GREET Model Life-Cycle Analysis Approach

Michael Wang
Systems Assessment Group
Center for Transportation Research
Argonne National Laboratory

GREET Training Workshop
Chicago, May 18, 2012

The GREET (Greenhouse gases, Regulated Emissions, and Energy use in Transportation) Model at Argonne National Lab

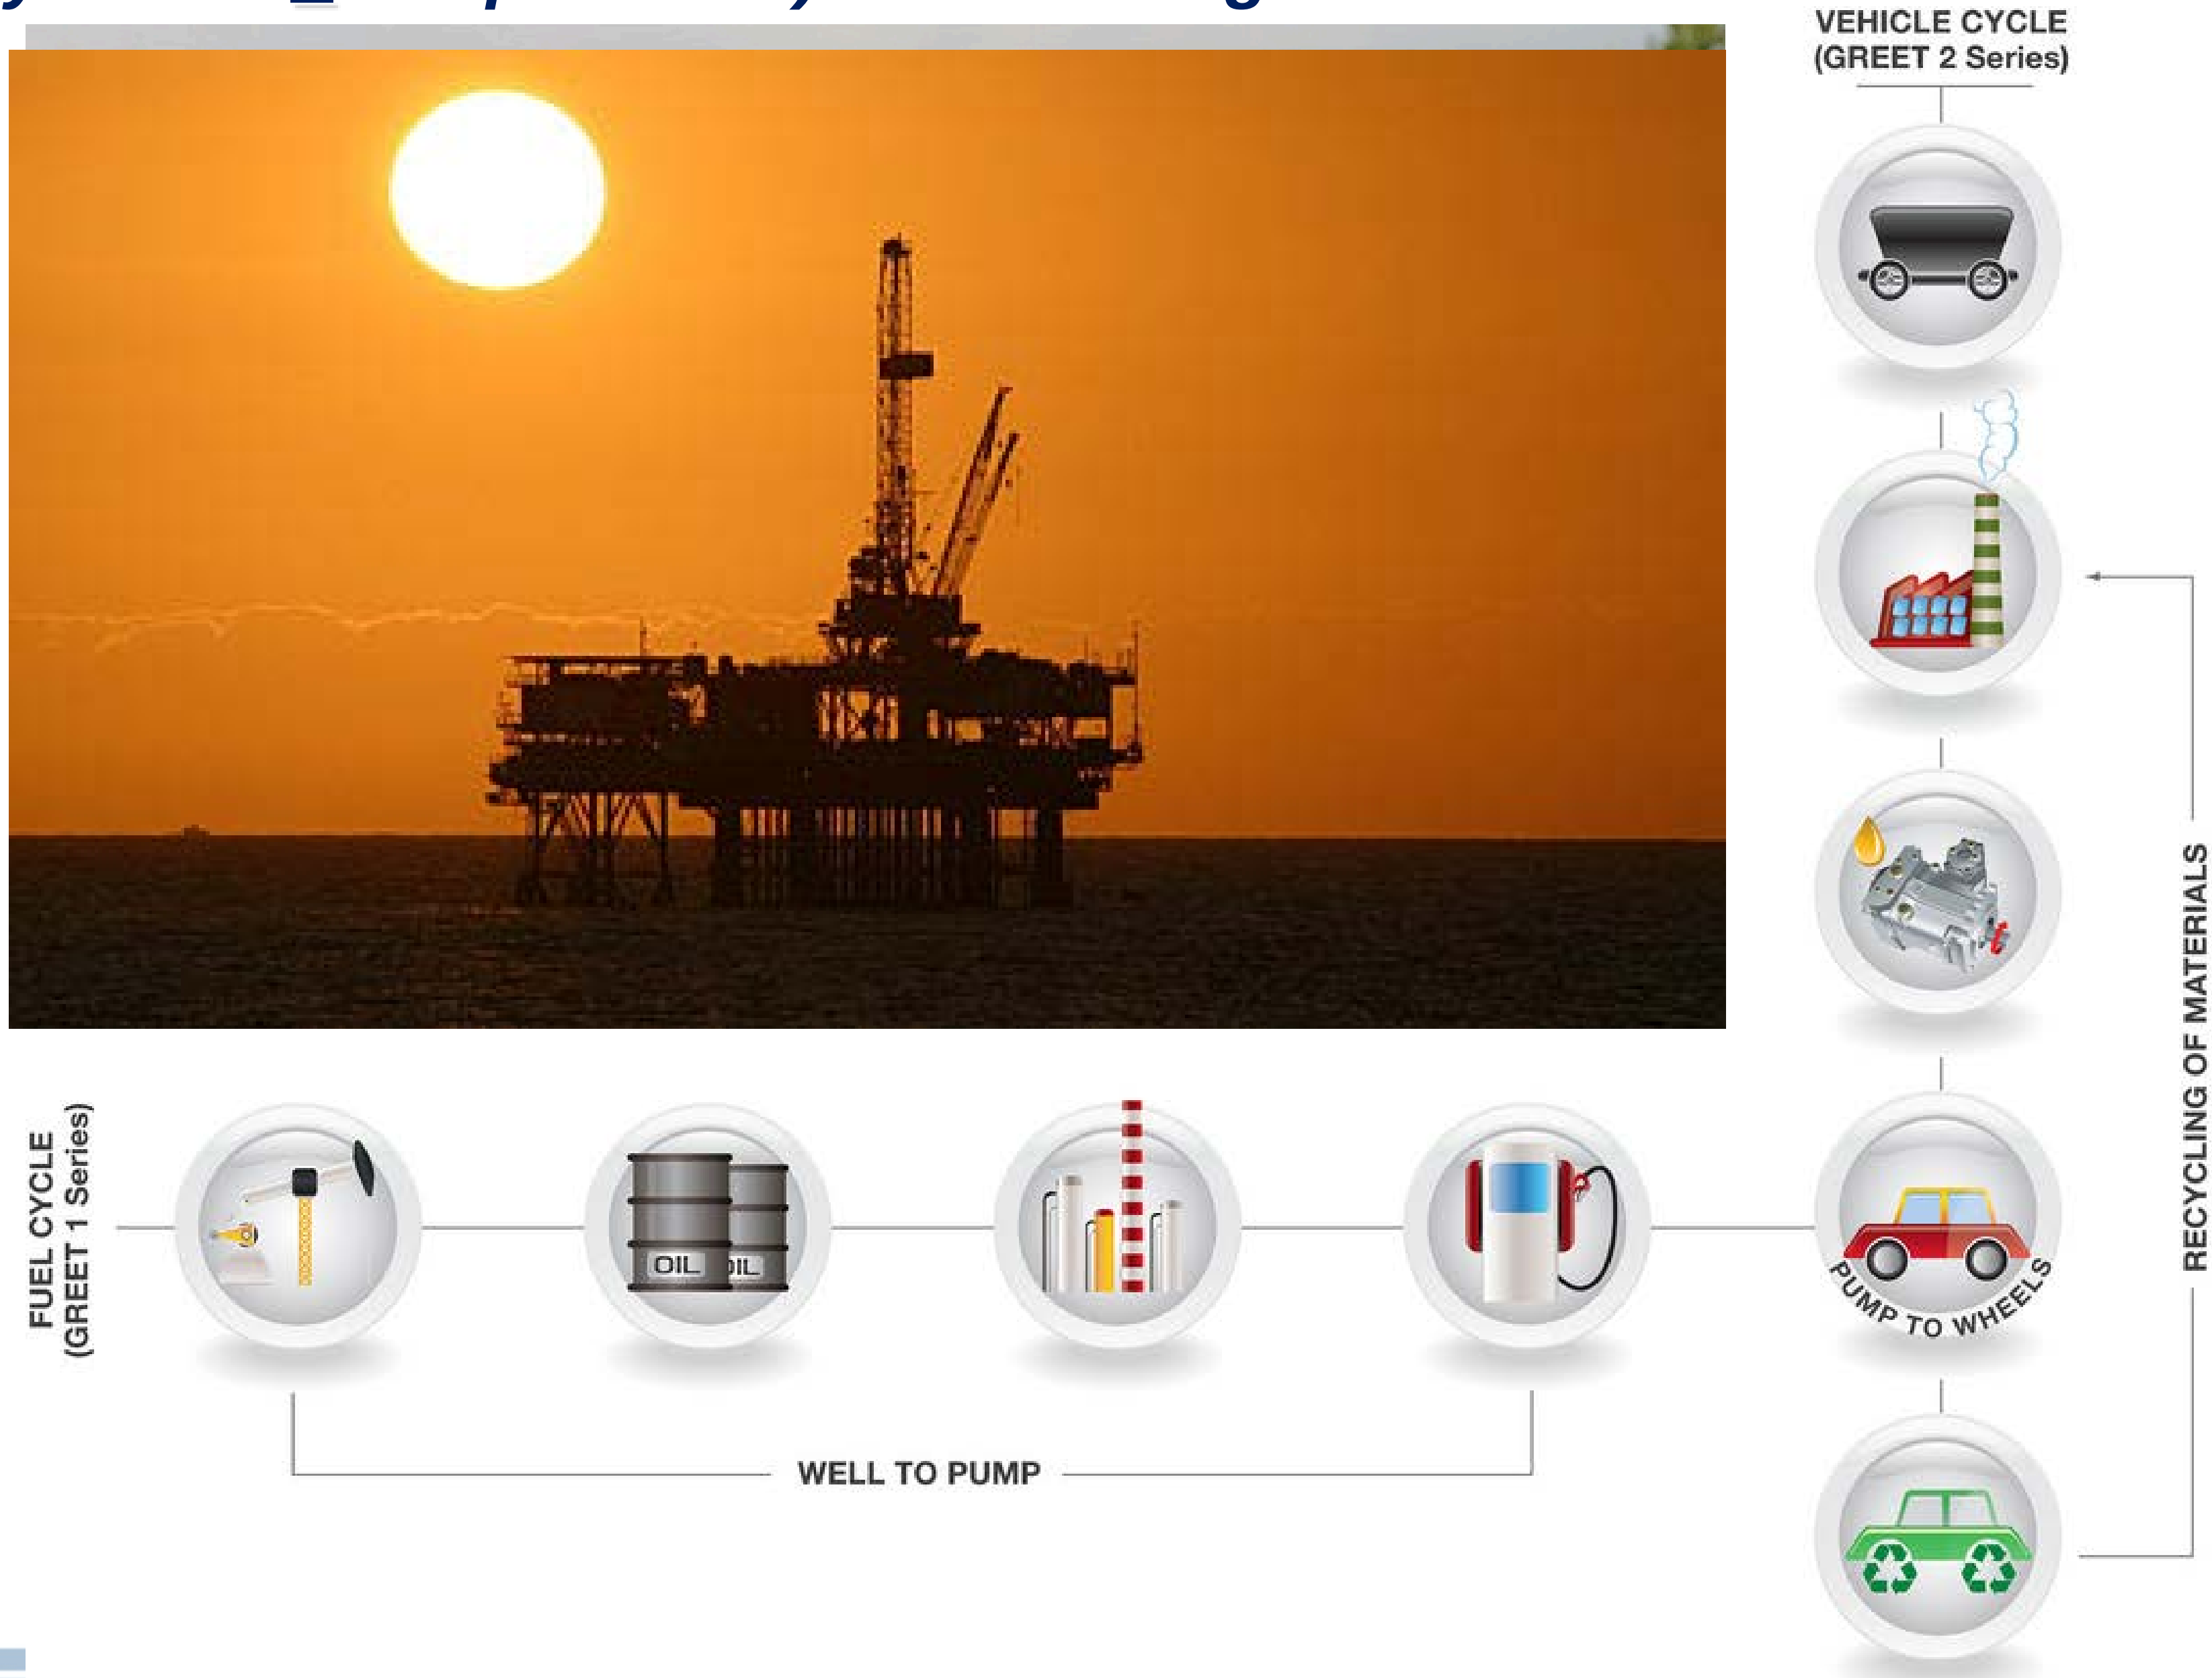

The Suite of GREET Models

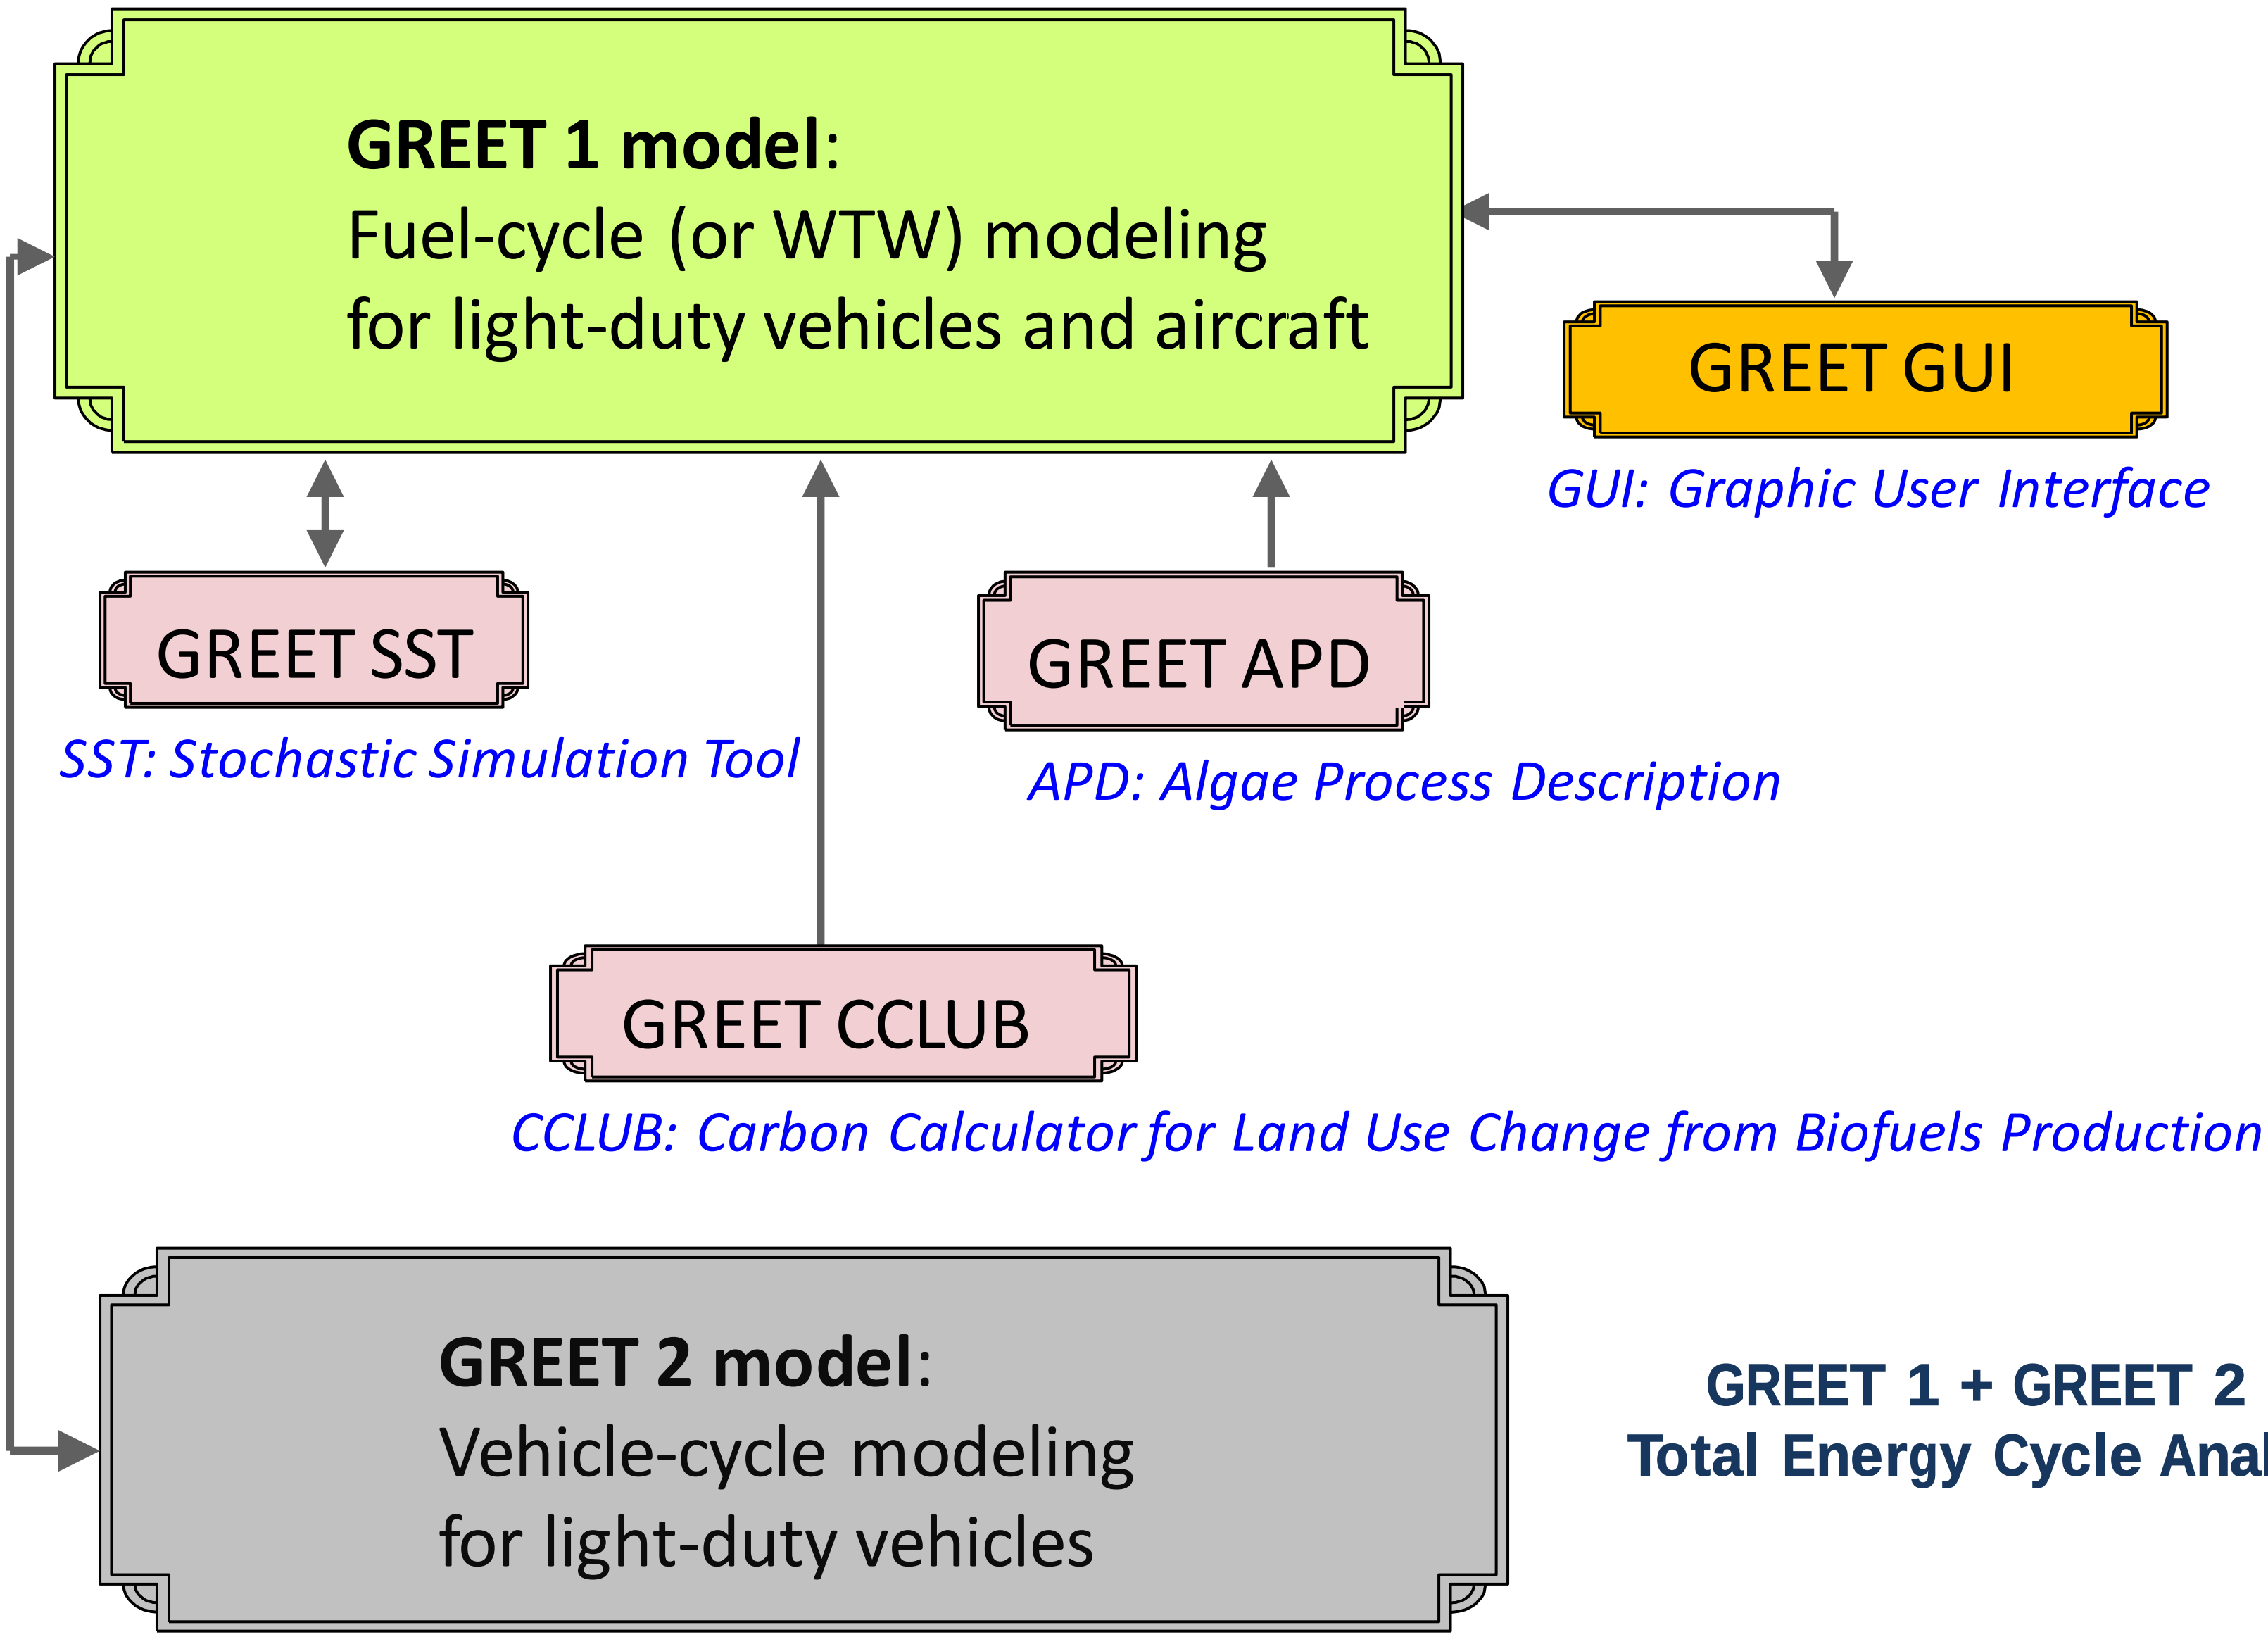

GREET 1 + GREET 2 =
Total Energy Cycle Analysis

GREET Is Available at Its Website

- GREET development has been supported by Department of Energy
- The most recent GREET version (GREET1_2011) was released in Oct. 2011
- GREET and its documents are available at the GREET website

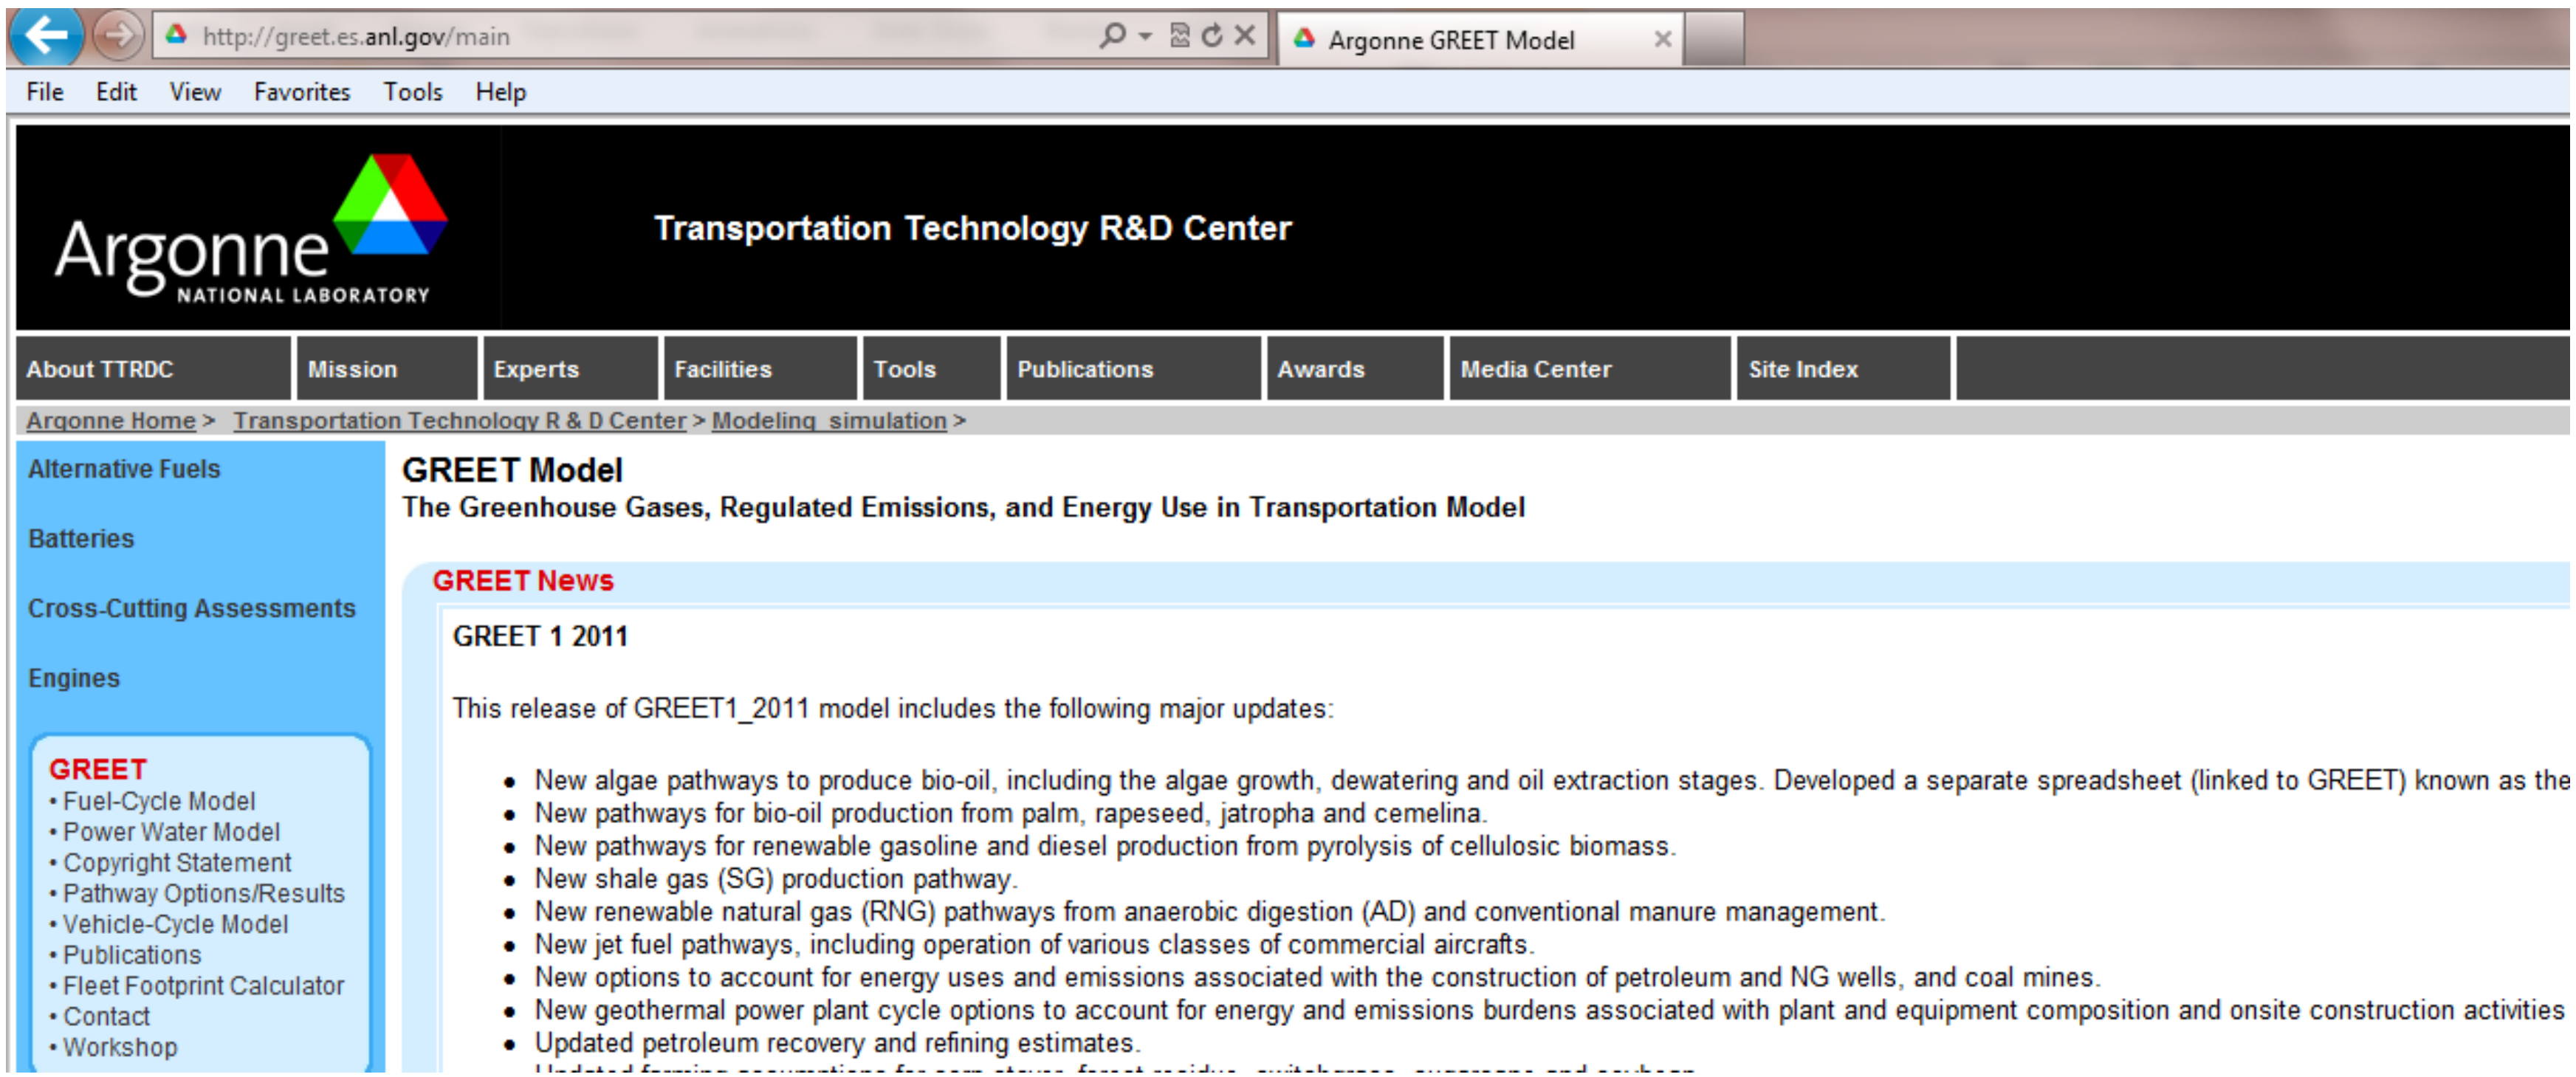

The GREET Model Estimates Energy Use and Emissions of GHGs and Criteria Pollutants for Vehicle/Fuel Systems

- Energy use
  - Total energy: fossil energy and renewable energy
    - Fossil energy: petroleum, natural gas, and coal (they are estimated separately)
    - Renewable energy: biomass, nuclear energy, hydro-power, wind power, and solar energy
- Greenhouse gases (GHGs)
  - CO_2, CH_4, and N_2O
  - CO_2e of the three (with their global warming potentials)
- Criteria pollutants
  - VOC, CO, NO_x, PM_{10}, $PM_{2.5}$, and SO_x
  - They are estimated separately for
    - Total (emissions everywhere)
    - Urban (a subset of the total)

GREET Includes More Than 100 Fuel Production Pathways from Various Energy Feedstocks

Petroleum Conventional Oil Sands	Gasoline Diesel Liquefied Petroleum Gas Residual Oil (to electricity) Jet Fuel
Natural Gas North American Shale Gas Non-North American	Compressed Natural Gas Liquefied Natural Gas Liquefied Petroleum Gas Hydrogen Methanol Dimethyl Ether Fischer-Tropsch Diesel Fischer-Tropsch Jet Fuel
Corn	Ethanol Butanol
Sugarcane	Ethanol
Soybeans	Biodiesel Renewable Diesel Renewable Gasoline Renewable Jet Fuel
Coke Oven Gas Petroleum Coke Nuclear Energy	Hydrogen
Coal	Hydrogen Methanol Dimethyl Ether Fischer-Tropsch Diesel Fischer-Tropsch Jet Fuel
Renewable Natural Gas Landfill Gas Biogas from anaerobic digestion	Compressed Natural Gas Liquefied Natural Gas Hydrogen Methanol Dimethyl Ether Fischer-Tropsch Diesel Fischer-Tropsch Jet Fuel
Cellulosic Biomass Switchgrass Fast Growing Trees Crop Residues Forest Residues	Ethanol Hydrogen Methanol Dimethyl Ether Fischer-Tropsch Diesel Fischer-Tropsch Jet Fuel
Residual Oil Coal Natural Gas Biomass Other Renewables (hydro, wind, solar, geothermal)	Electricity
Algae	Biodiesel Renewable Diesel Renewable Gasoline Renewable Jet Fuel

The yellow boxes contain the names of the feedstocks and the red boxes contain the names of the fuels that can be produced from each of those feedstocks.

GREET Includes Many Biofuel Production Pathways

- Ethanol via fermentation from
  - Corn
  - Sugarcane
  - Cellulosic biomass
    - Crop residues
    - Dedicated energy crops
    - Forest residues

- Cellulosic biomass via gasification to
  - Fischer-Tropsch diesel
  - Fischer-Tropsch jet fuel

- Cellulosic biomass via pyrolysis to
  - Gasoline
  - Diesel
  - Jet fuel

- Renewable natural gas from
  - Landfill gas
  - Anaerobic digestion of animal wastes

- Corn to butanol

- Soybeans to
  - Biodiesel
  - Renewable diesel
  - Renewable gasoline
  - Renewable jet fuel

- Algae to
  - Biodiesel
  - Renewable diesel
  - Renewable gasoline
  - Renewable jet fuel

Electricity Generation Systems in GREET

- ❑ **Coal: Steam Boiler and IGCC**
  - ➢ Coal mining and cleaning
  - ➢ Coal transportation
  - ➢ Power generation

- ❑ **Natural Gas: Steam Boiler, Gas Turbine, and NGCC**
  - ➢ NG recovery and processing
  - ➢ NG transmission
  - ➢ Power generation

- ❑ **Biomass: Steam Boiler**
  - ➢ Biomass farming and harvesting
  - ➢ Biomass transportation
  - ➢ Power generation

- ❑ **Nuclear: Light Water Reactor**
  - ➢ Uranium mining
  - ➢ Yellowcake conversion
  - ➢ Enrichment
  - ➢ Fuel rod fabrication
  - ➢ Power generation

- ❑ **Hydro Power**

- ❑ **Wind Power**

- ❑ **Residual Oil: Steam Boiler**
  - ➢ Oil recovery and transportation
  - ➢ Oil refining
  - ➢ Residual oil transportation
  - ➢ Power generation

- ❑ **Solar Power via Photovoltaics**

- ❑ **Geothermal Power**

GREET Examines More Than 80 Vehicle/Fuel Systems

Conventional Spark-Ignition Engine Vehicles
- Gasoline
- Compressed natural gas, liquefied natural gas, and liquefied petroleum gas
- Gaseous and liquid hydrogen
- Methanol and ethanol
- Renewable gasoline
- Pyrolysis-based gasoline

Spark-Ignition, Direct-Injection Engine Vehicles
- Gasoline
- Methanol and ethanol

Compression-Ignition, Direct-Injection Engine Vehicles
- Diesel
- Fischer-Tropsch diesel
- Dimethyl ether
- Biodiesel
- Renewable diesel
- Pyrolysis-based diesel

Fuel Cell Vehicles
- On-board hydrogen storage
  - Gaseous and liquid hydrogen from various sources
- On-board hydrocarbon reforming to hydrogen

Battery-Powered Electric Vehicles
- Various electricity generation sources

Hybrid Electric Vehicles (HEVs)
- Spark-ignition engines:
  - Gasoline
  - Compressed natural gas, liquefied natural gas, and liquefied petroleum gas
  - Gaseous and liquid hydrogen
  - Methanol and ethanol
- Compression-ignition engines
  - Diesel
  - Fischer-Tropsch diesel
  - Dimethyl ether
  - Biodiesel

Plug-in Hybrid Electric Vehicles (PHEVs)
- Spark-ignition engines:
  - Gasoline
  - Compressed natural gas, liquefied natural gas, and liquefied petroleum gas
  - Gaseous and liquid hydrogen
  - Methanol and ethanol
- Compression-ignition engines
  - Diesel
  - Fischer-Tropsch diesel
  - Dimethyl ether
  - Biodiesel
- Fuel cell
  - Gaseous and liquid hydrogen from various sources

Aviation Fuel Options in GREET

Fuels and Feedstocks

- **Petroleum Jet Fuel**
  - Conventional Crude
  - Oil Sand
- **Pyrolysis Oil Jet Fuel**
  - Crop Residues
  - Forest Residues
  - Dedicated Energy Crops
- **Hydrotreated Renewable Jet Fuel**
  - Soybeans
  - Palm Oil
  - Rapeseeds
  - Jatropha
  - Camelina
  - Algae
- **Fischer-Tropsch Jet Fuel**
  - North American Natural Gas
  - Non-North American Natural Gas
  - Renewable Natural Gas
  - Shale Gas
  - Biomass via Gasification
  - Coal via Gasification
  - Coal/Biomass via Gasification

Aircraft Types

- **Passenger Aircraft**
  - Single Aisle
  - Small Twin Aisle
  - Large Twin Aisle
  - Large Quad
  - Regional Jet
  - Business Jet
- **Freight Aircraft**
  - Single Aisle
  - Small Twin Aisle
  - Large Twin Aisle
  - Large Quad
- **LCA Functional Units**
  - Per MJ of fuel
  - Per kg-km
  - Per passenger-km

(In collaboration with MIT PARTNER)

Key LCA Issues

- System boundary
  - Construction of infrastructure vs. operation stages of the complete life cycle
  - Indirect effects primarily via market/pricing effects
- Technology choices for LCAs
  - LCA comparison among pathway technologies
    - ✓ Fuel production: commercial ones vs. emerging ones still at the R&D stage
    - ✓ Vehicle technologies: performance equivalency
  - Pathway definition: technology options for pathway processes
    - ✓ Existing vs. emerging
    - ✓ Environmental sustainability vs. economic viability
  - Inter- and intra-pathway technology choices result in many options
- Methods of addressing co-products of transportation fuels
- Life-cycle analysis methodologies
  - Attributional LCA: GREET approach (with supplement of consequential LCA results)
  - Consequential LCA

LCA System Boundary: Petroleum to Gasoline

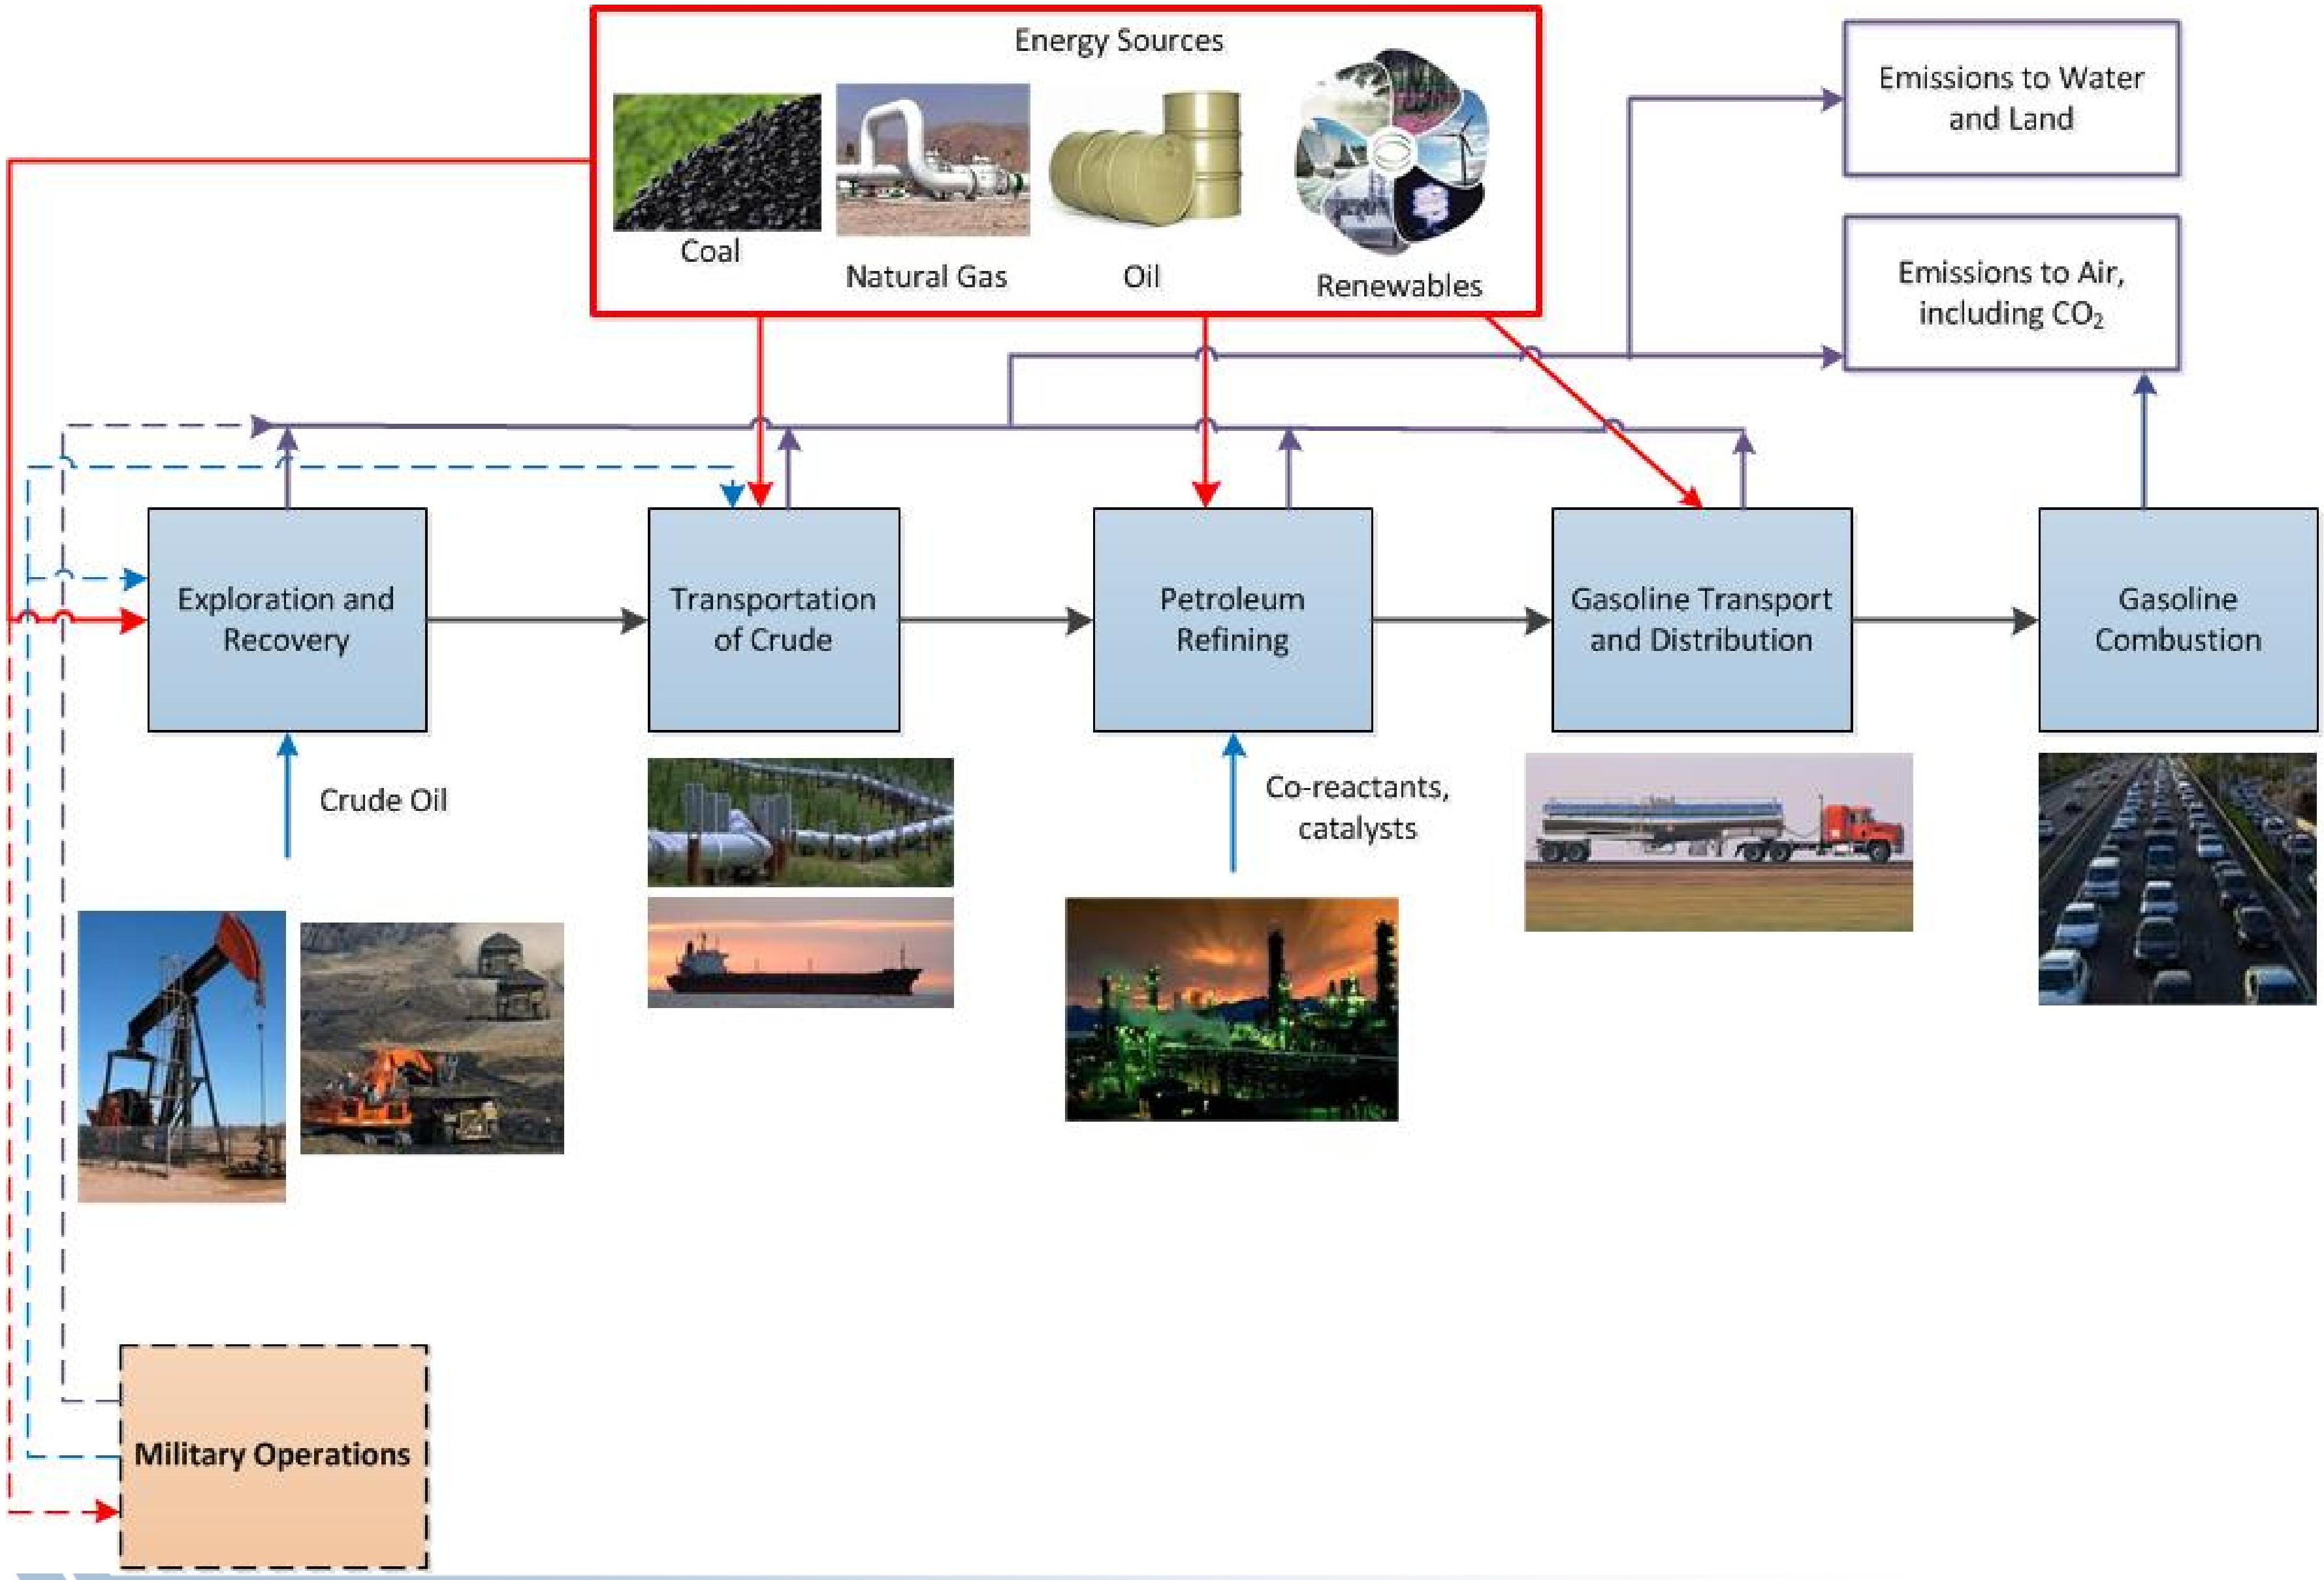

LCA System Boundary: Corn to Ethanol

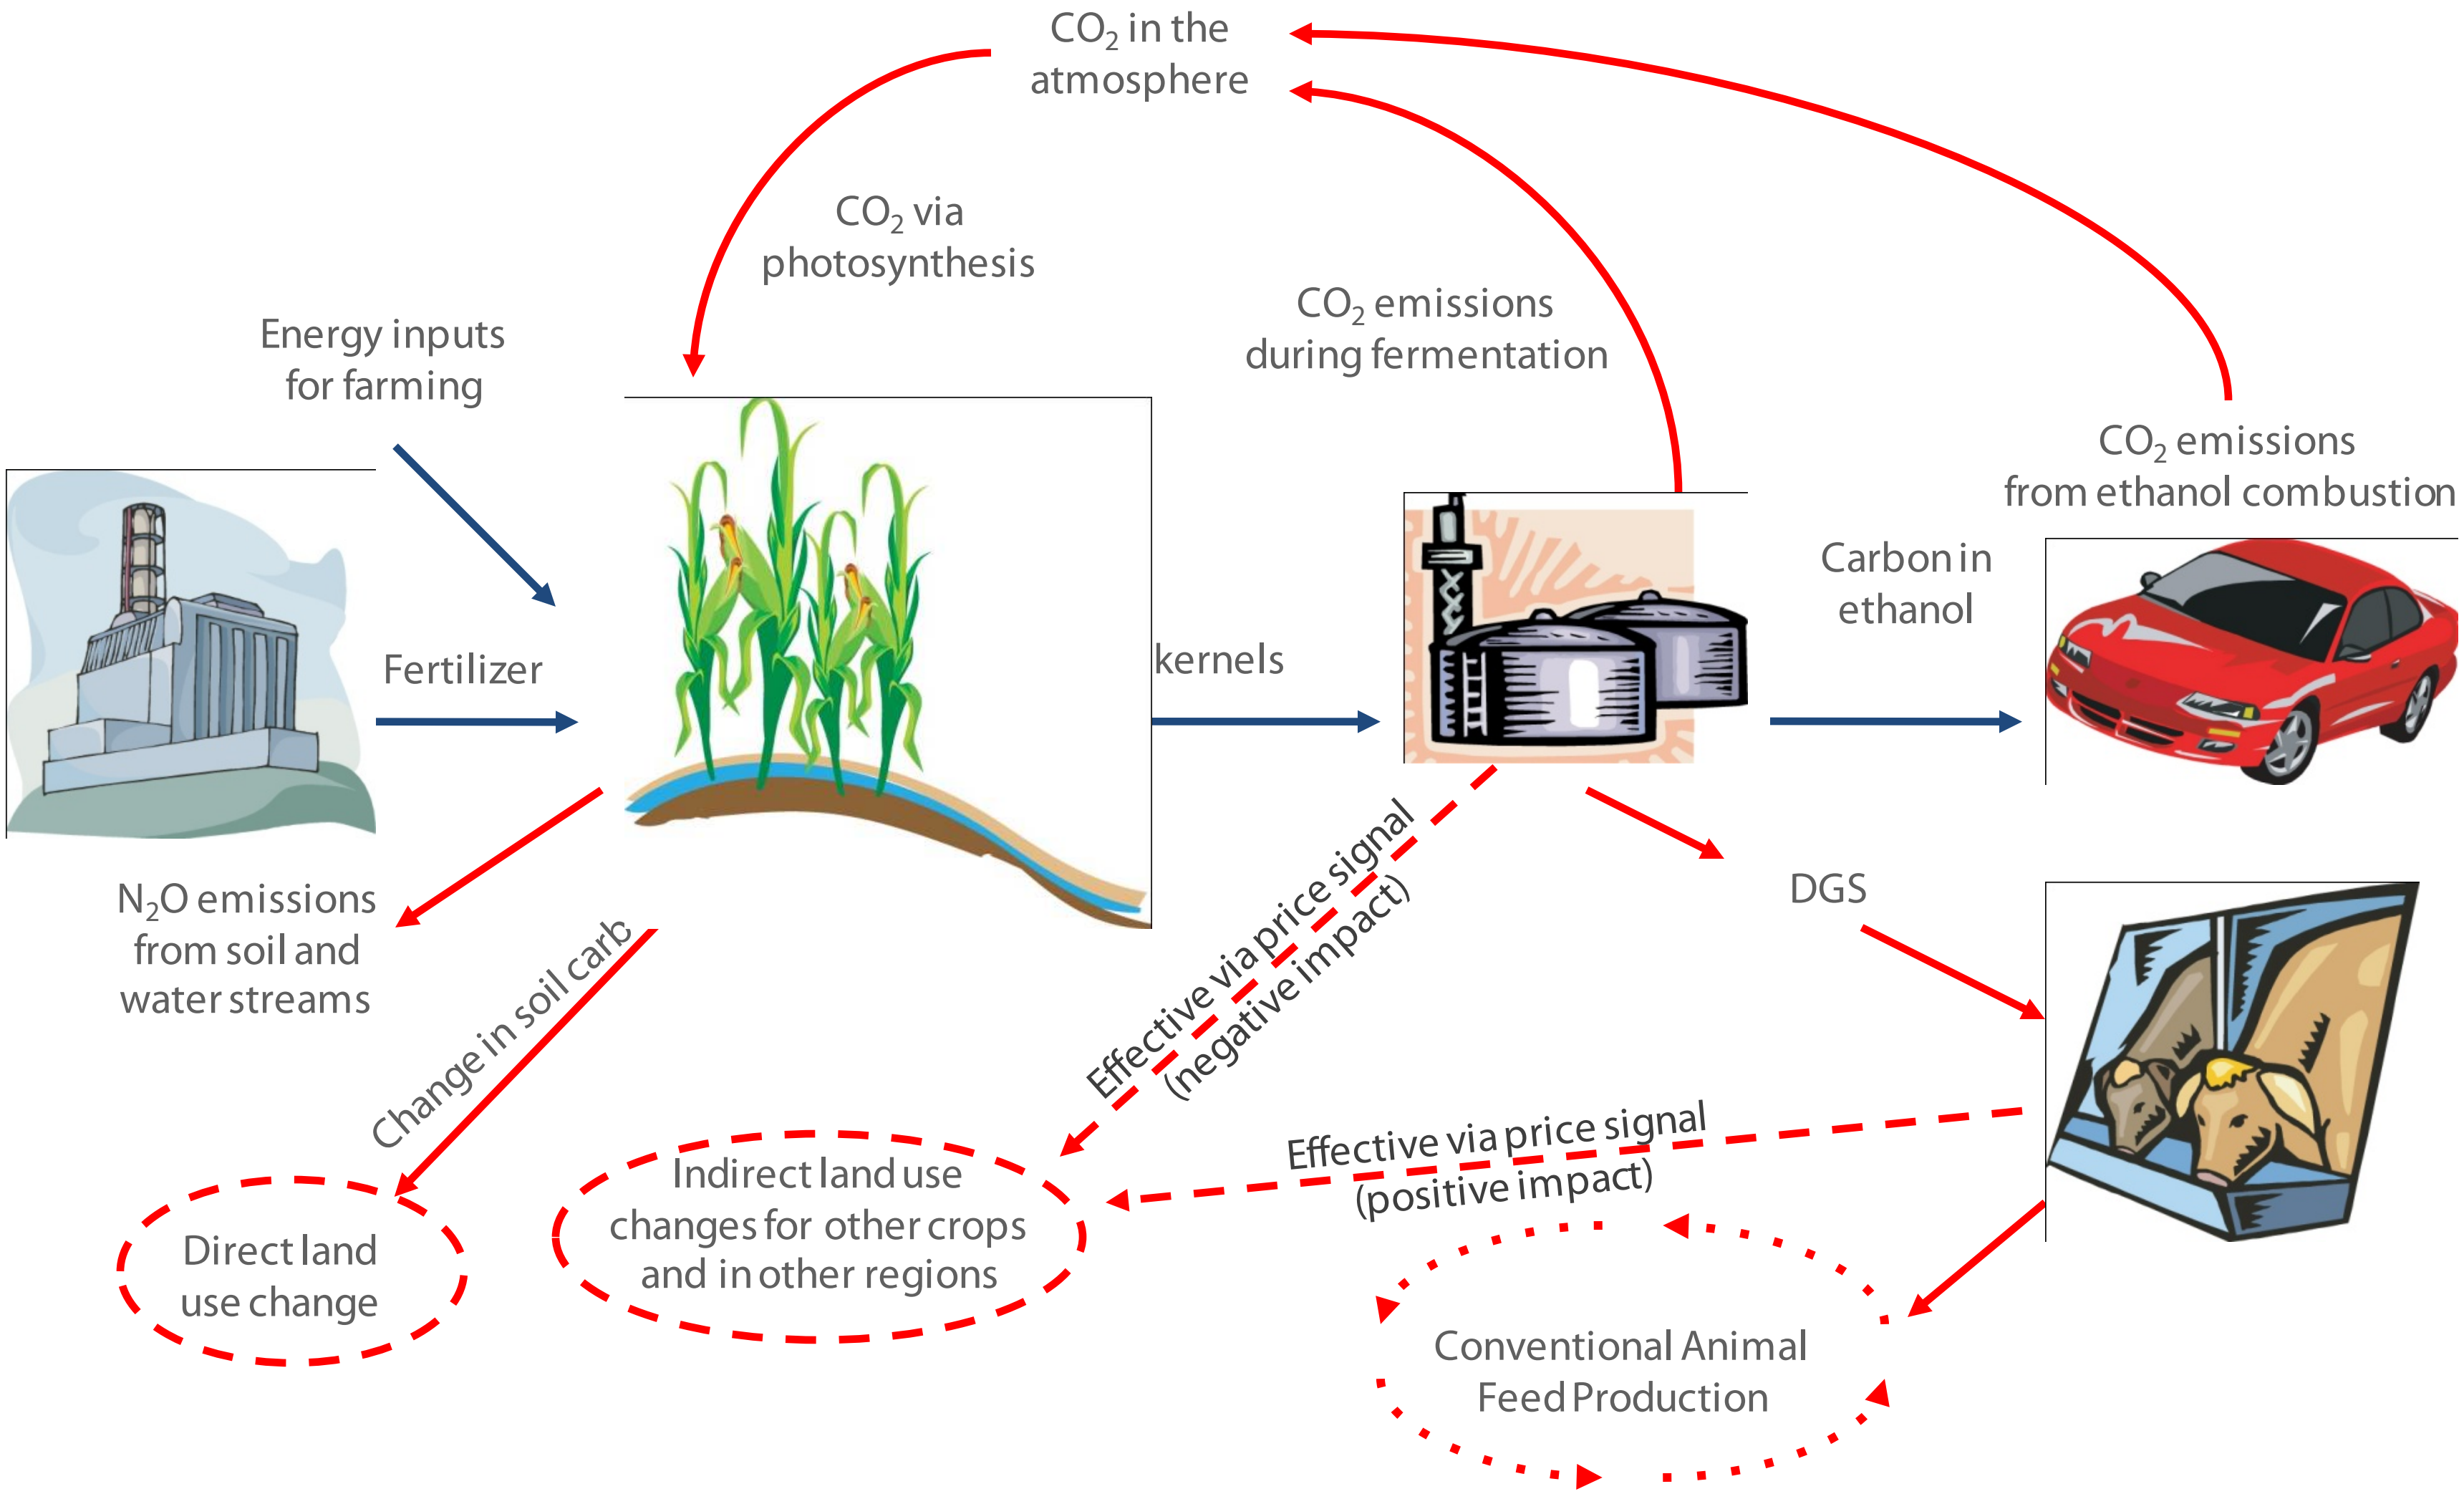

Life-Cycle Analysis of Electricity

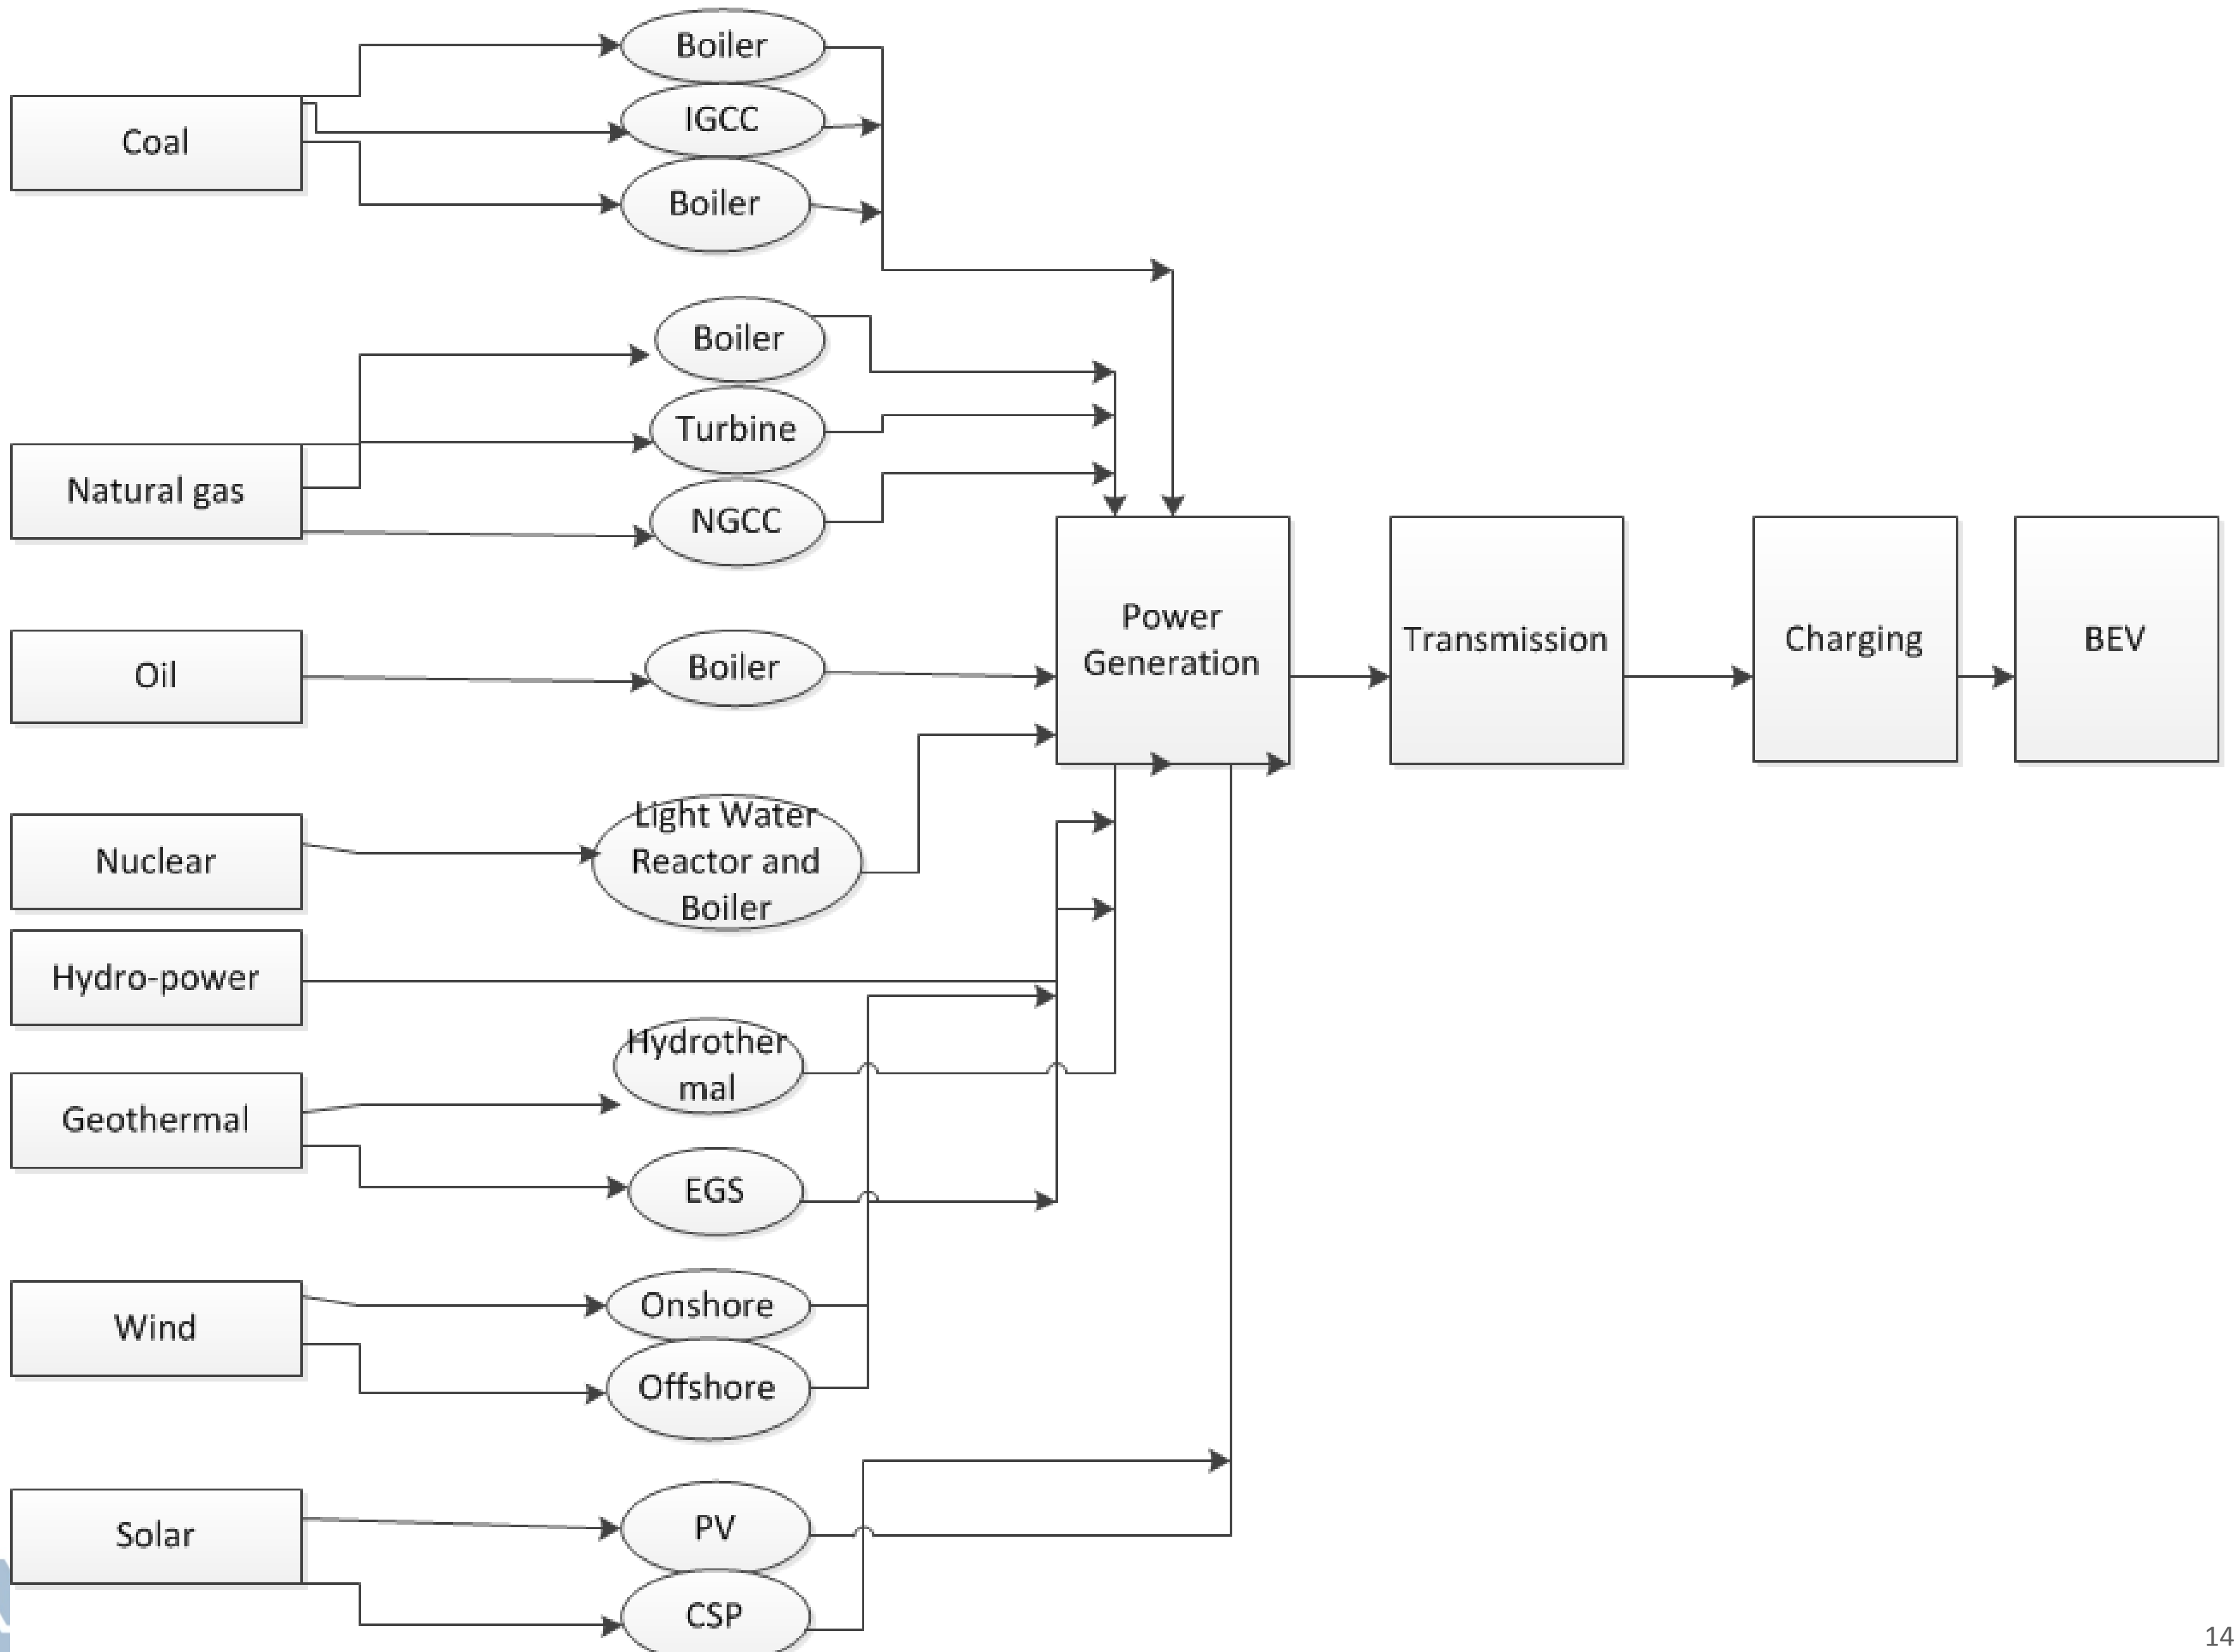

Plant Construction and Operation GHG Emissions of Different Power Systems (g of CO2e per kWh)

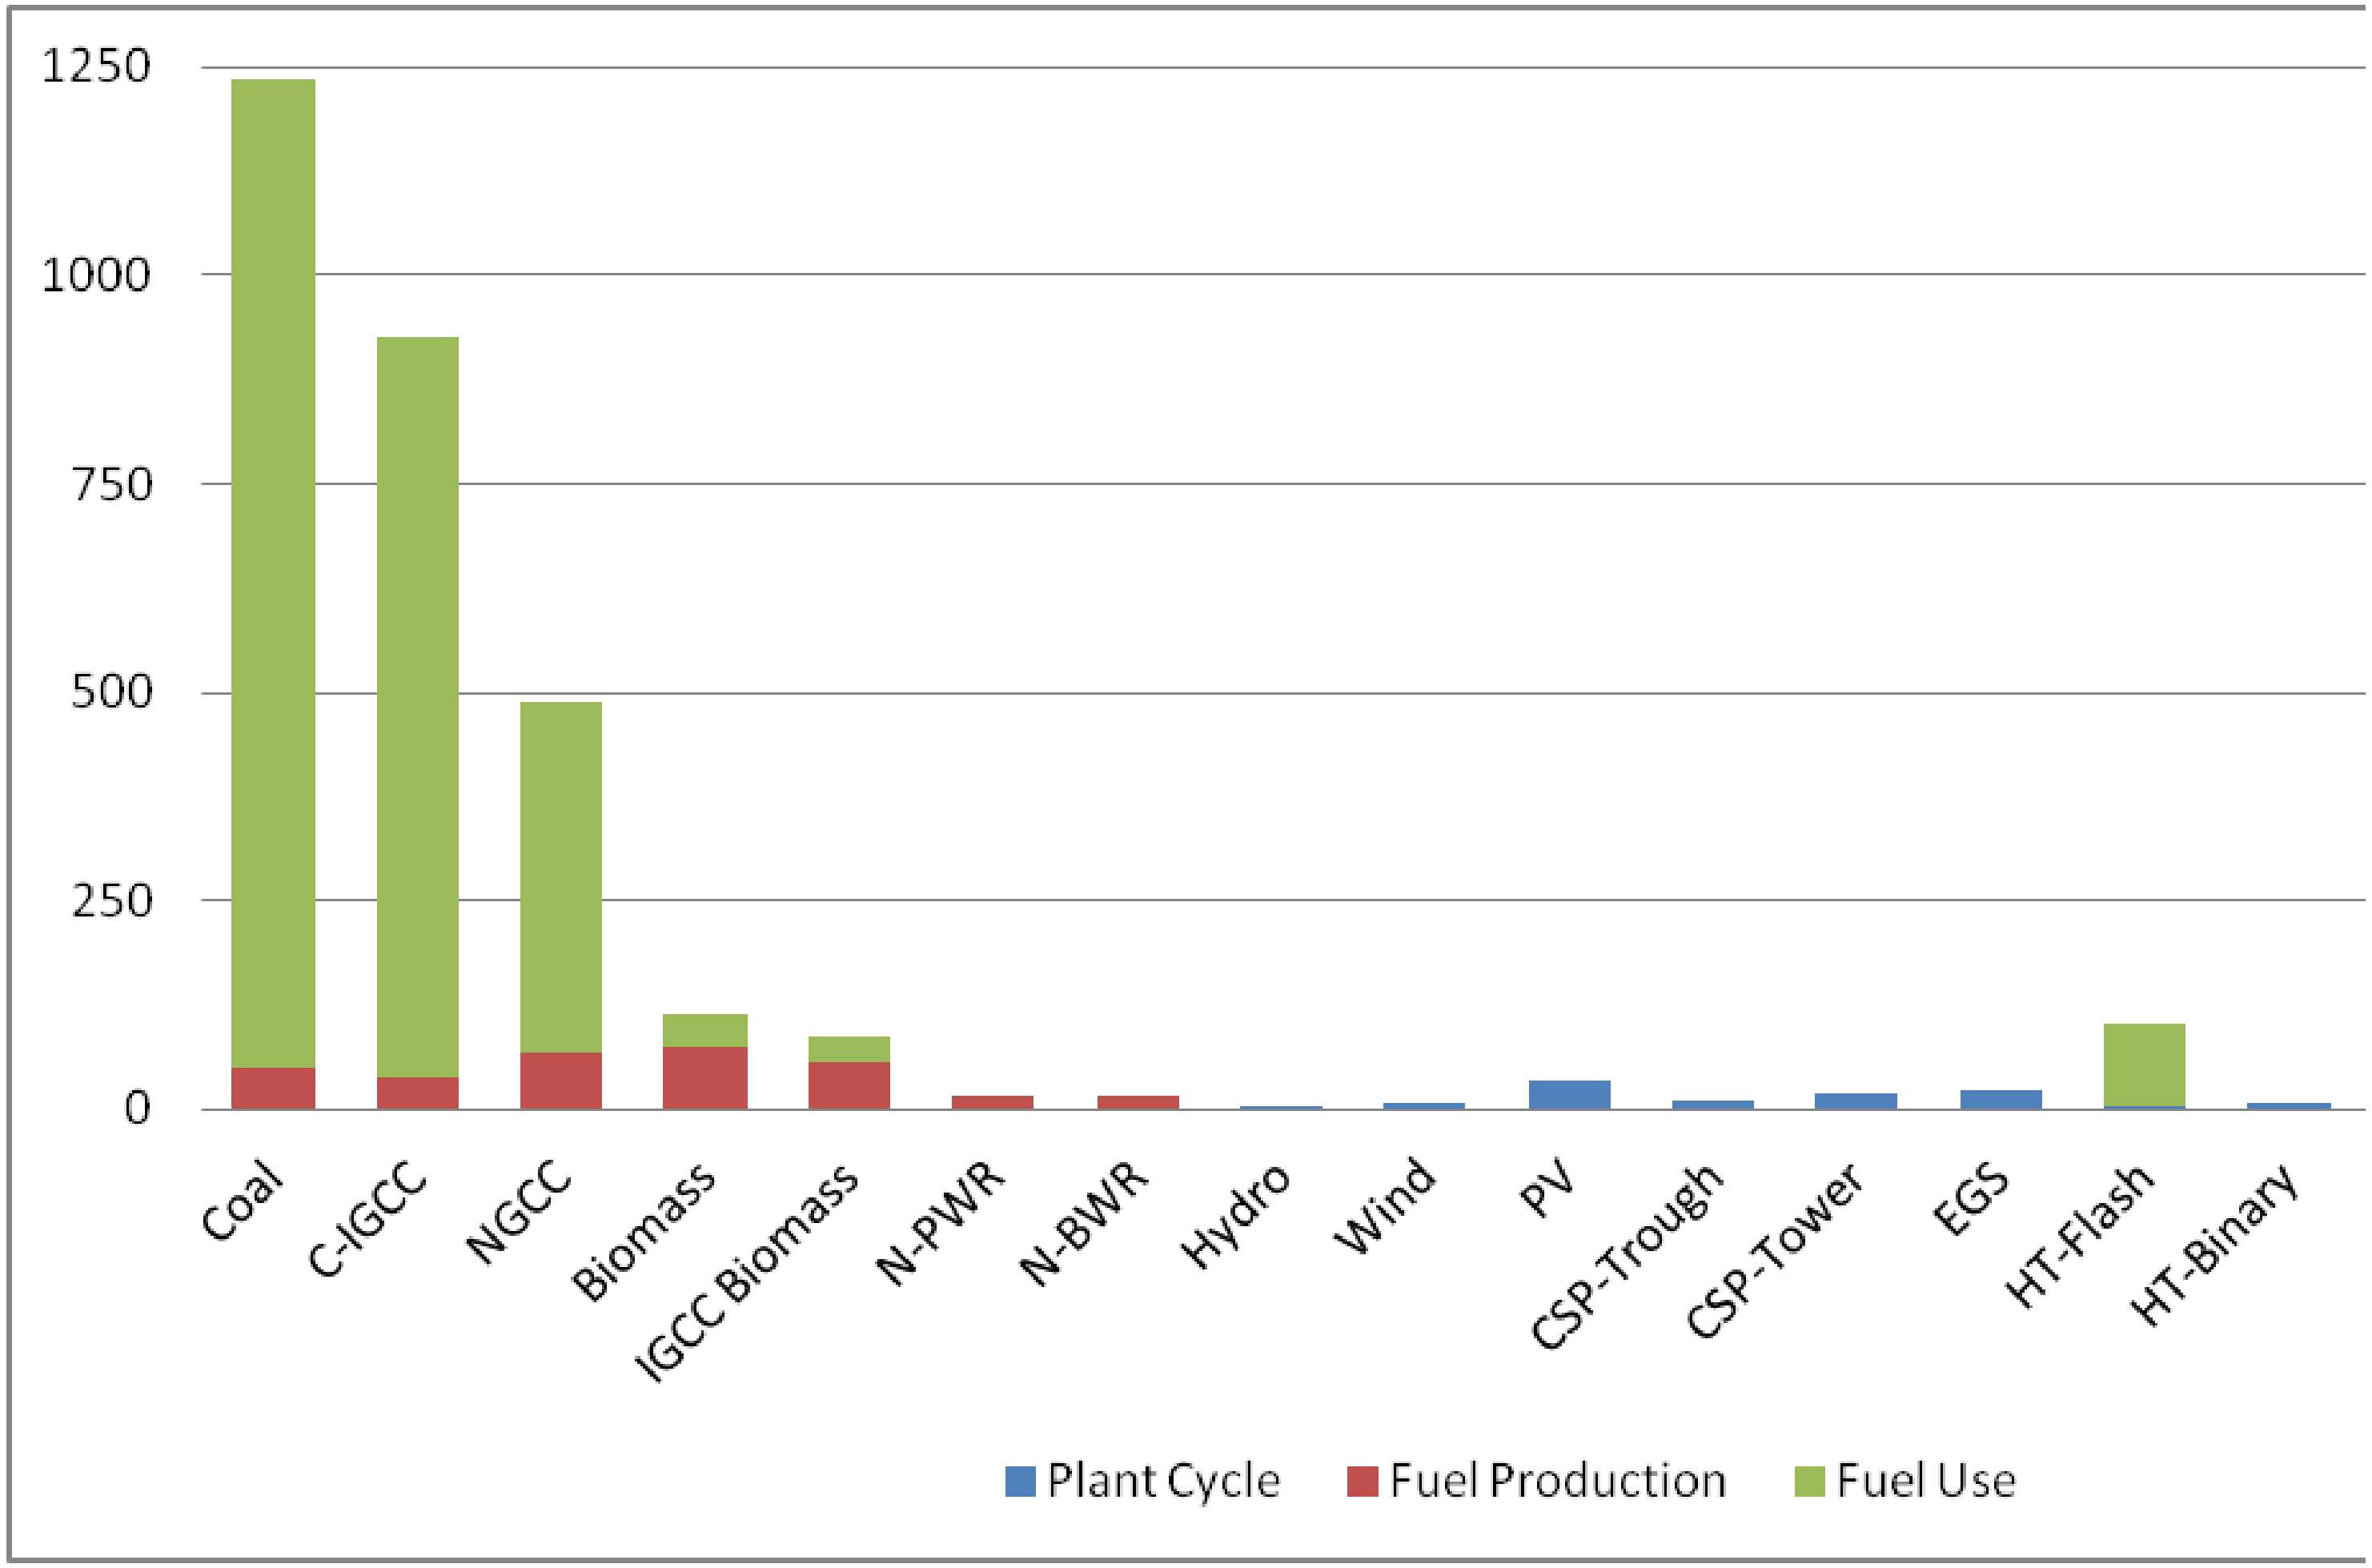

Co-Product Methods: Benefits and Issues

- Displacement method
  - Data intensive: need detailed understanding of the displaced product sector
  - Dynamic results: fluctuate with economic and market modifications
- Allocation methods: based on mass, energy, or market revenue
  - Easy to use
  - Frequent updates not required for mature industry, e.g. petroleum refineries
  - Mass-based allocation: not applicable for certain cases
  - Energy-based allocation: less accurate with non-fuel co-products
  - Market revenue based allocation: subject to price variation
- Process energy use approach
  - Requires detailed engineering analysis
  - Must allocate upstream burdens based on mass, energy, or market revenue
- There is no consensus in policy and research arena on which method is the most appropriate; GREET offers several methods for users to select

Co-Product Displacement of Equivalent Product

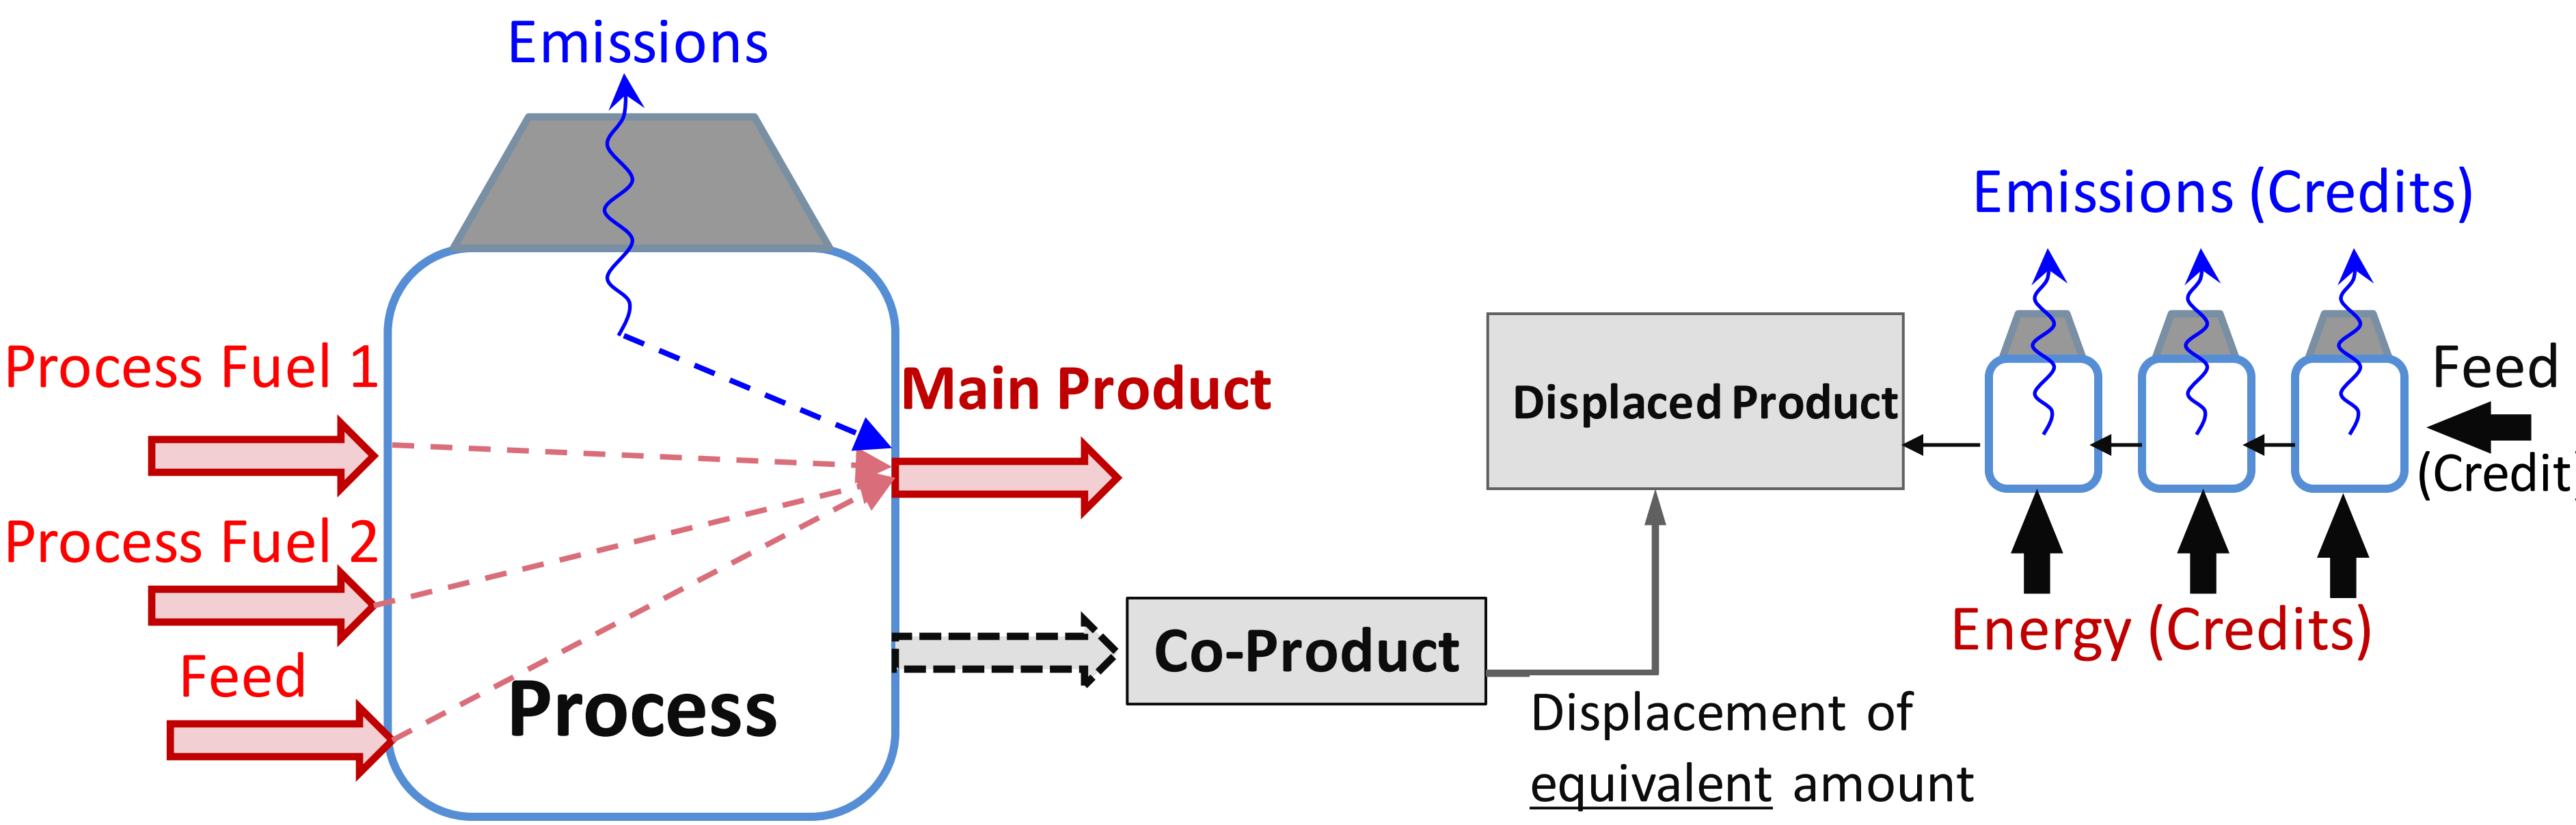

Important Notes:

- Main product carry the burden of all process energy and emissions
- Co-product does not carry any burden
- Displaced product is identical or equivalent to co-product
  - ✓ If not identical, a displacement ratio may apply
- All life-cycle energy and emissions of the displaced product are credited to main product
- For large co-product/main product ratio, credits may overwhelm main process emissions

Allocation of Process Energy and Emissions to Co-Products

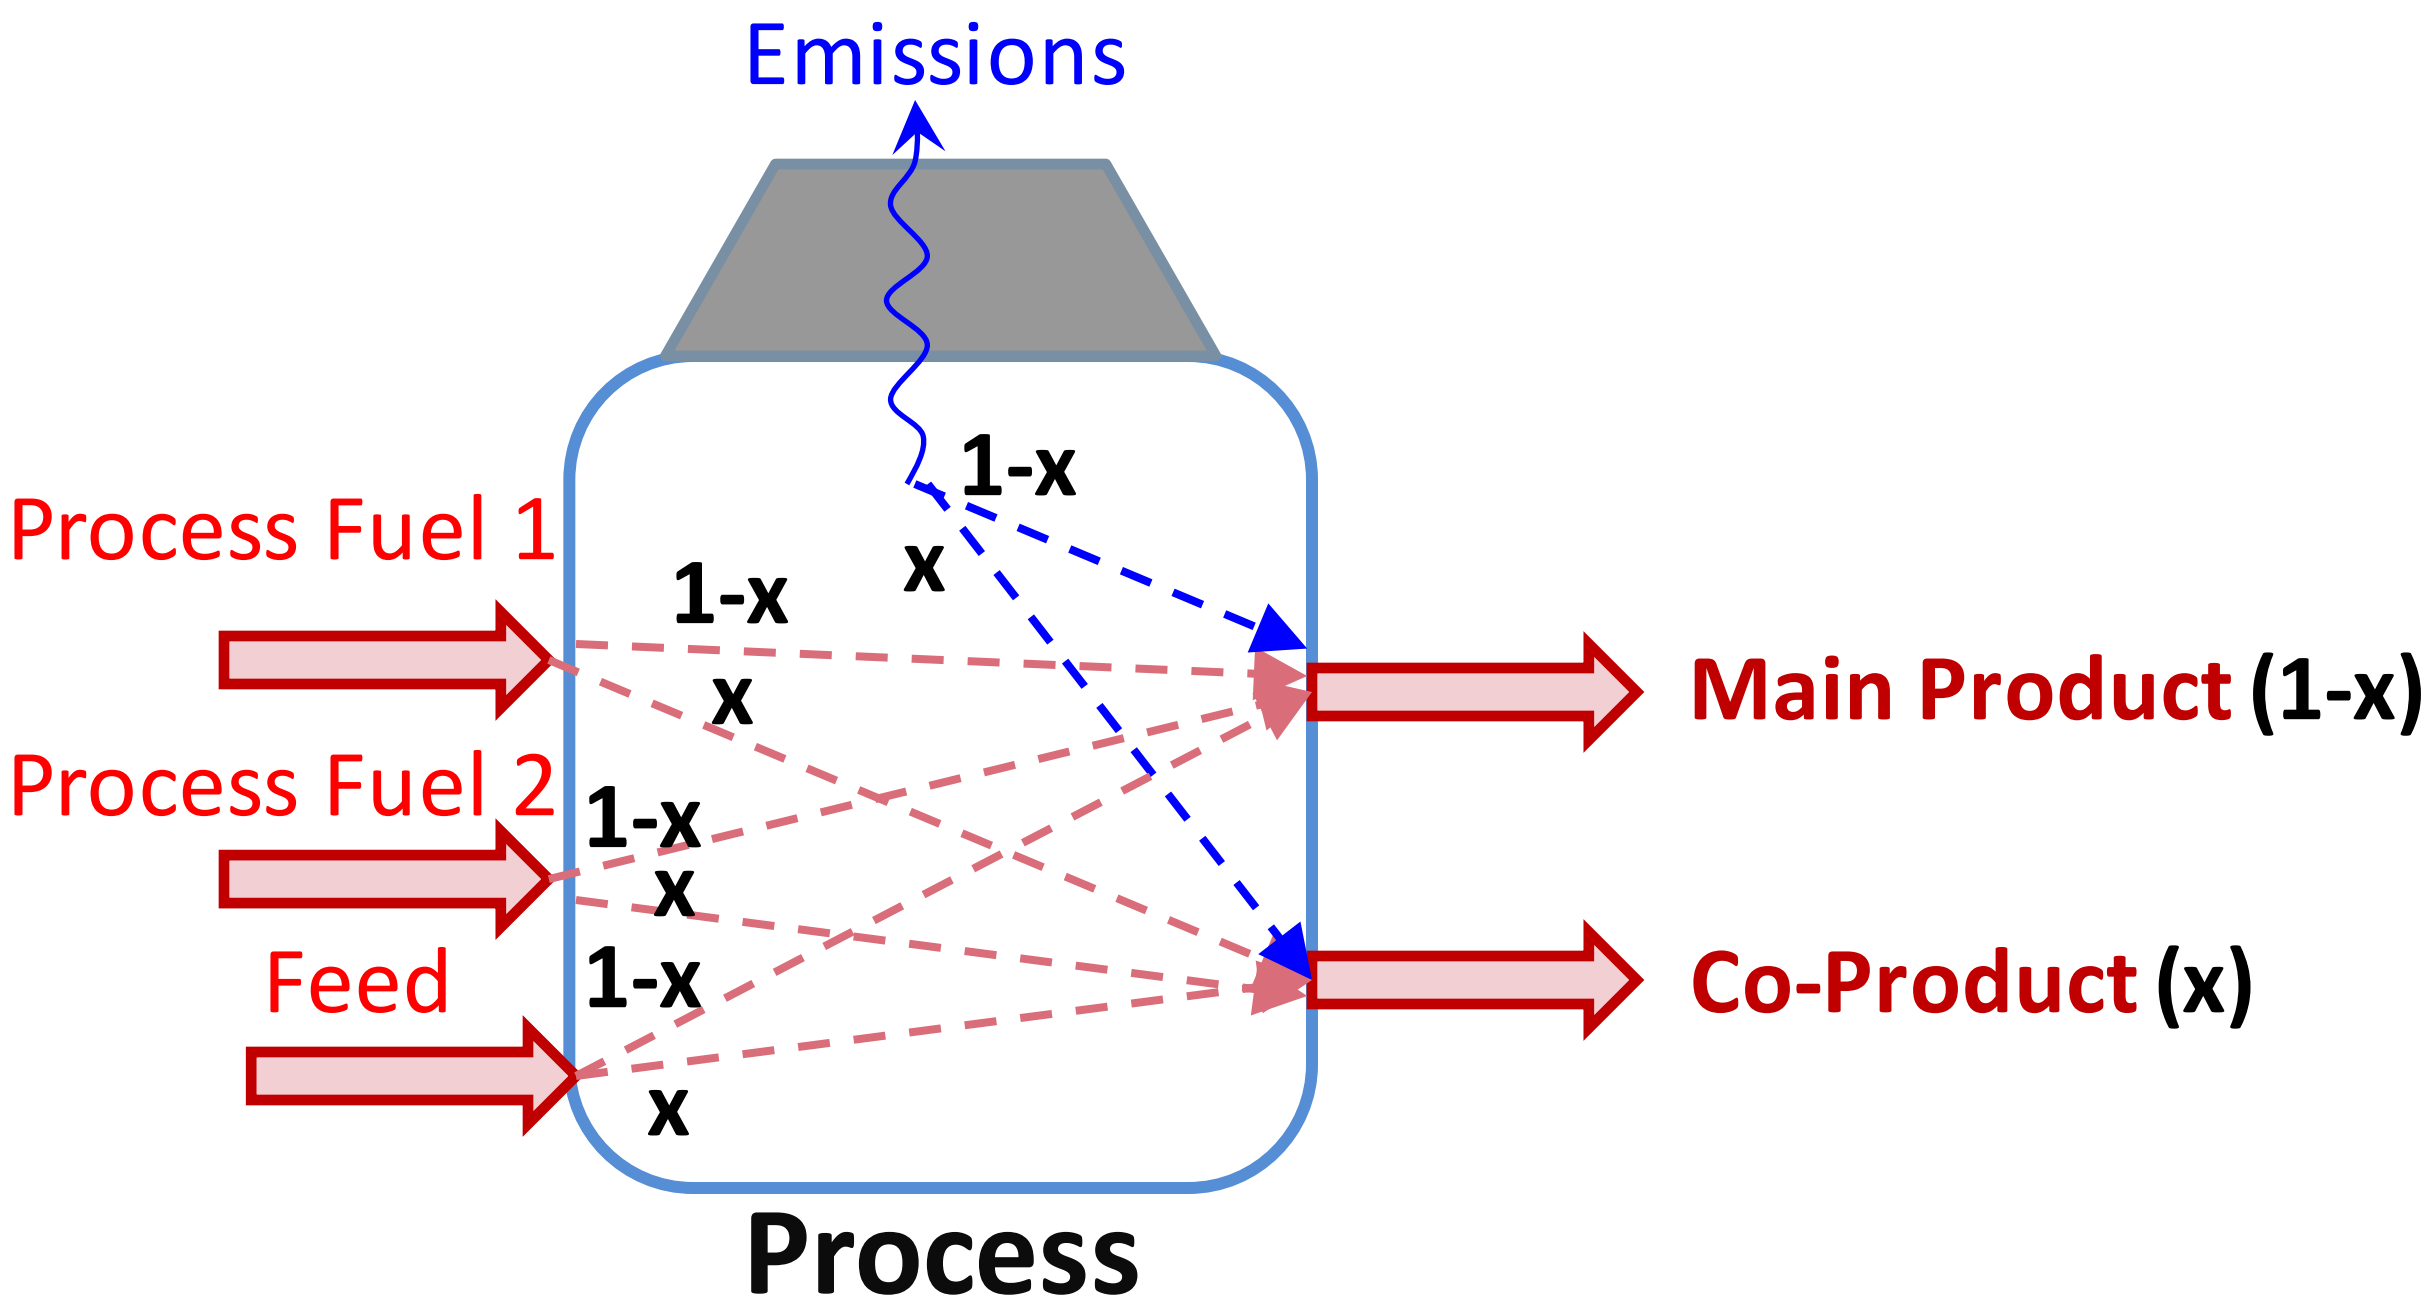

Important Notes:

- **x** is the ratio of co-product in all products by mass, energy, or market value
- Main product and co-product carry energy and emissions burden based on their ratios in the total products
- The main product and co-product are equivalent (function at end use, quality, etc.)
- Same process efficiency applies to all products for energy allocation (implied)

Key Steps to Address GHG Emissions of Potential Land Use Changes by Large-Scale Biofuel Production

- Simulations of potential land use changes (ANL in collaboration with Purdue)
  - Significant efforts have been made to improve existing computational general equilibrium (CGE) models
  - Completed GTAP updates and upgrades
    - ✓ Land availability in key countries
    - ✓ Yields in response to elevated commodity price
    - ✓ Future grain supply and demand trends without ethanol production
    - ✓ Substitution of conventional animal feed with biofuel animal feeds
    - ✓ Inclusion of cellulosic biomass (stover, switchgrass, and miscanthus)
- Carbon profiles of major land types (ANL in collaboration with UIC and UIUC)
  - Both above-ground biomass and soil carbon are being considered
  - Of the available data sources, some are very detailed but others are very coarse (e.g., the IPCC data)
    - ✓ UIUC is conducting DAYCENT modeling for US soil types
  - There are mismatches between CGE simulated land types and land types in available carbon databases:
    - ✓ UIC is using USDA detailed data, satellite data with ground truthing

GREET 2 Simulates Vehicle-Cycle Energy Use and Emissions from Material Recovery to Vehicle Disposal

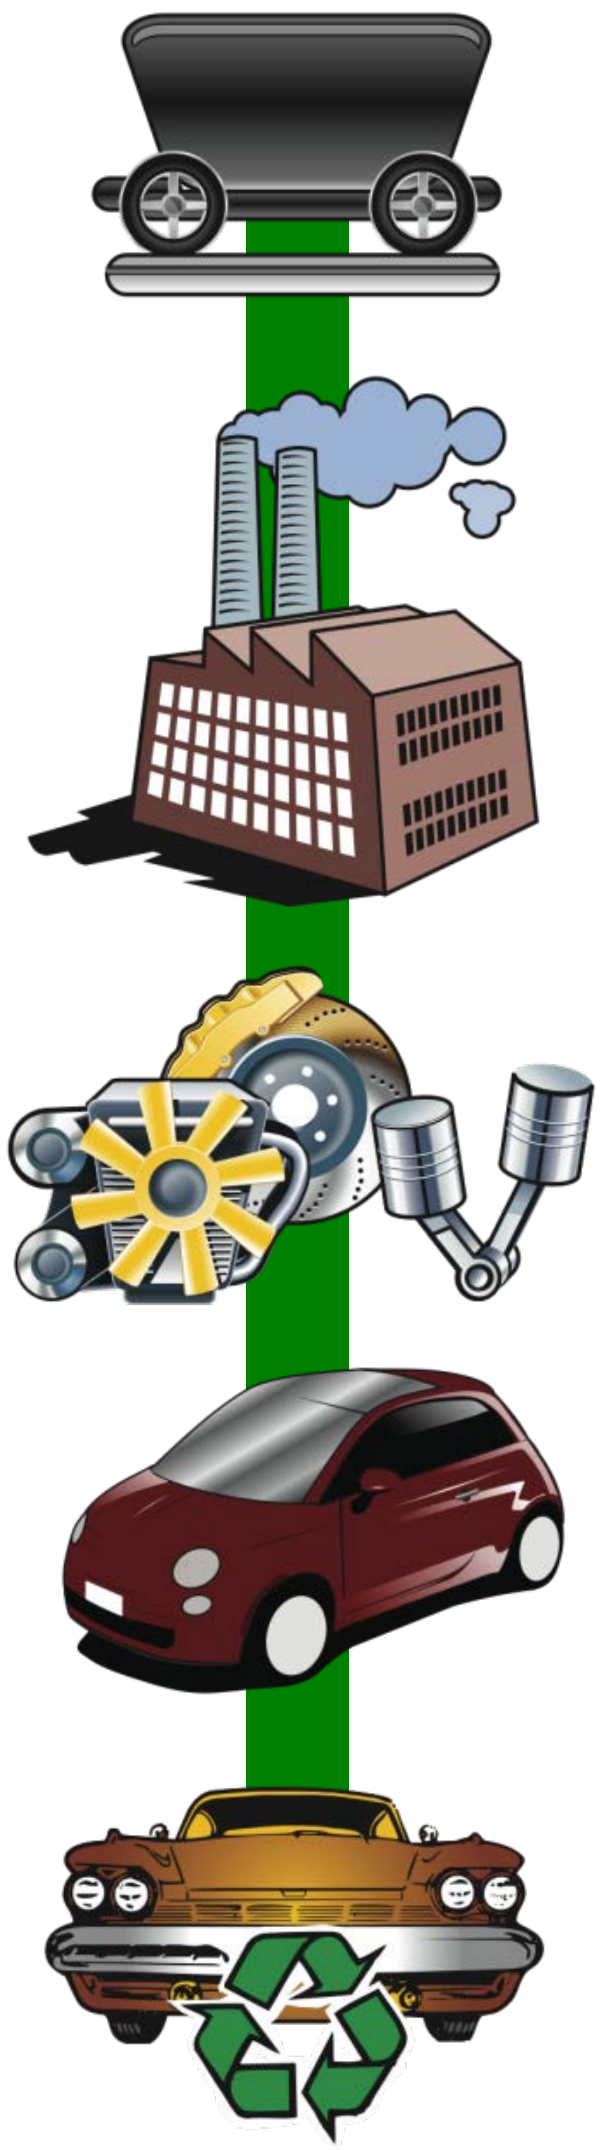

- Raw material recovery
- Material processing and fabrication
- Vehicle component production
- Vehicle assembly,
- Vehicle disposal and recycling

GREET 2 Vehicle-Cycle Technology Options

- Vehicle propulsion technologies
  - Internal combustion engine vehicle (ICEV)
  - Regular hybrid electric vehicle (HEV)
  - Fuel cell vehicle (FCV) with hybrid configuration
  - Plug-in hybrid electric vehicle (PHEV)
  - Battery electric vehicle (EV)
- Evaluate vehicle material compositions
  - Conventional
  - Lightweighting (LW)
- Vehicle types
  - Light-duty vehicles: passenger car, SUV, pick-up truck

GREET 2 Separates Vehicle-Cycle Analysis Into Four Categories

1. Components
   - Includes powertrain (engine or fuel cell), transmission, chassis, traction motor, generator, electronic controller, fuel cell auxiliaries (H2 tank, piping, etc.), and body
2. Batteries
   - Startup: lead-acid
   - Motive: Ni-MH or Li-Ion
3. Fluids; can affect criteria pollutant emissions significantly
   - Engine oil, power steering fluid, brake fluid, transmission fluid, powertrain coolant, windshield fluid, adhesives
   - Replacement frequency during vehicle lifetime
4. Vehicle assembly, disposal, and recycling

Key Issues in GREET Vehicle-Cycle Analysis

- Energy and emission burdens for key vehicle materials (steel, aluminum, etc.)
- Use of virgin vs. recycled materials
- Vehicle weight and lightweighting options
- Vehicle lifetime, component rebuilding (e.g., heavy-duty vehicle engines), and component replacement cycle (e.g., battery)
- New vehicle components, especially for electric drive technologies
  - Batteries
  - Fuel cells
  - Motors

WTW emissions (g CO_2-eq/mile) (DOE EERE Record)

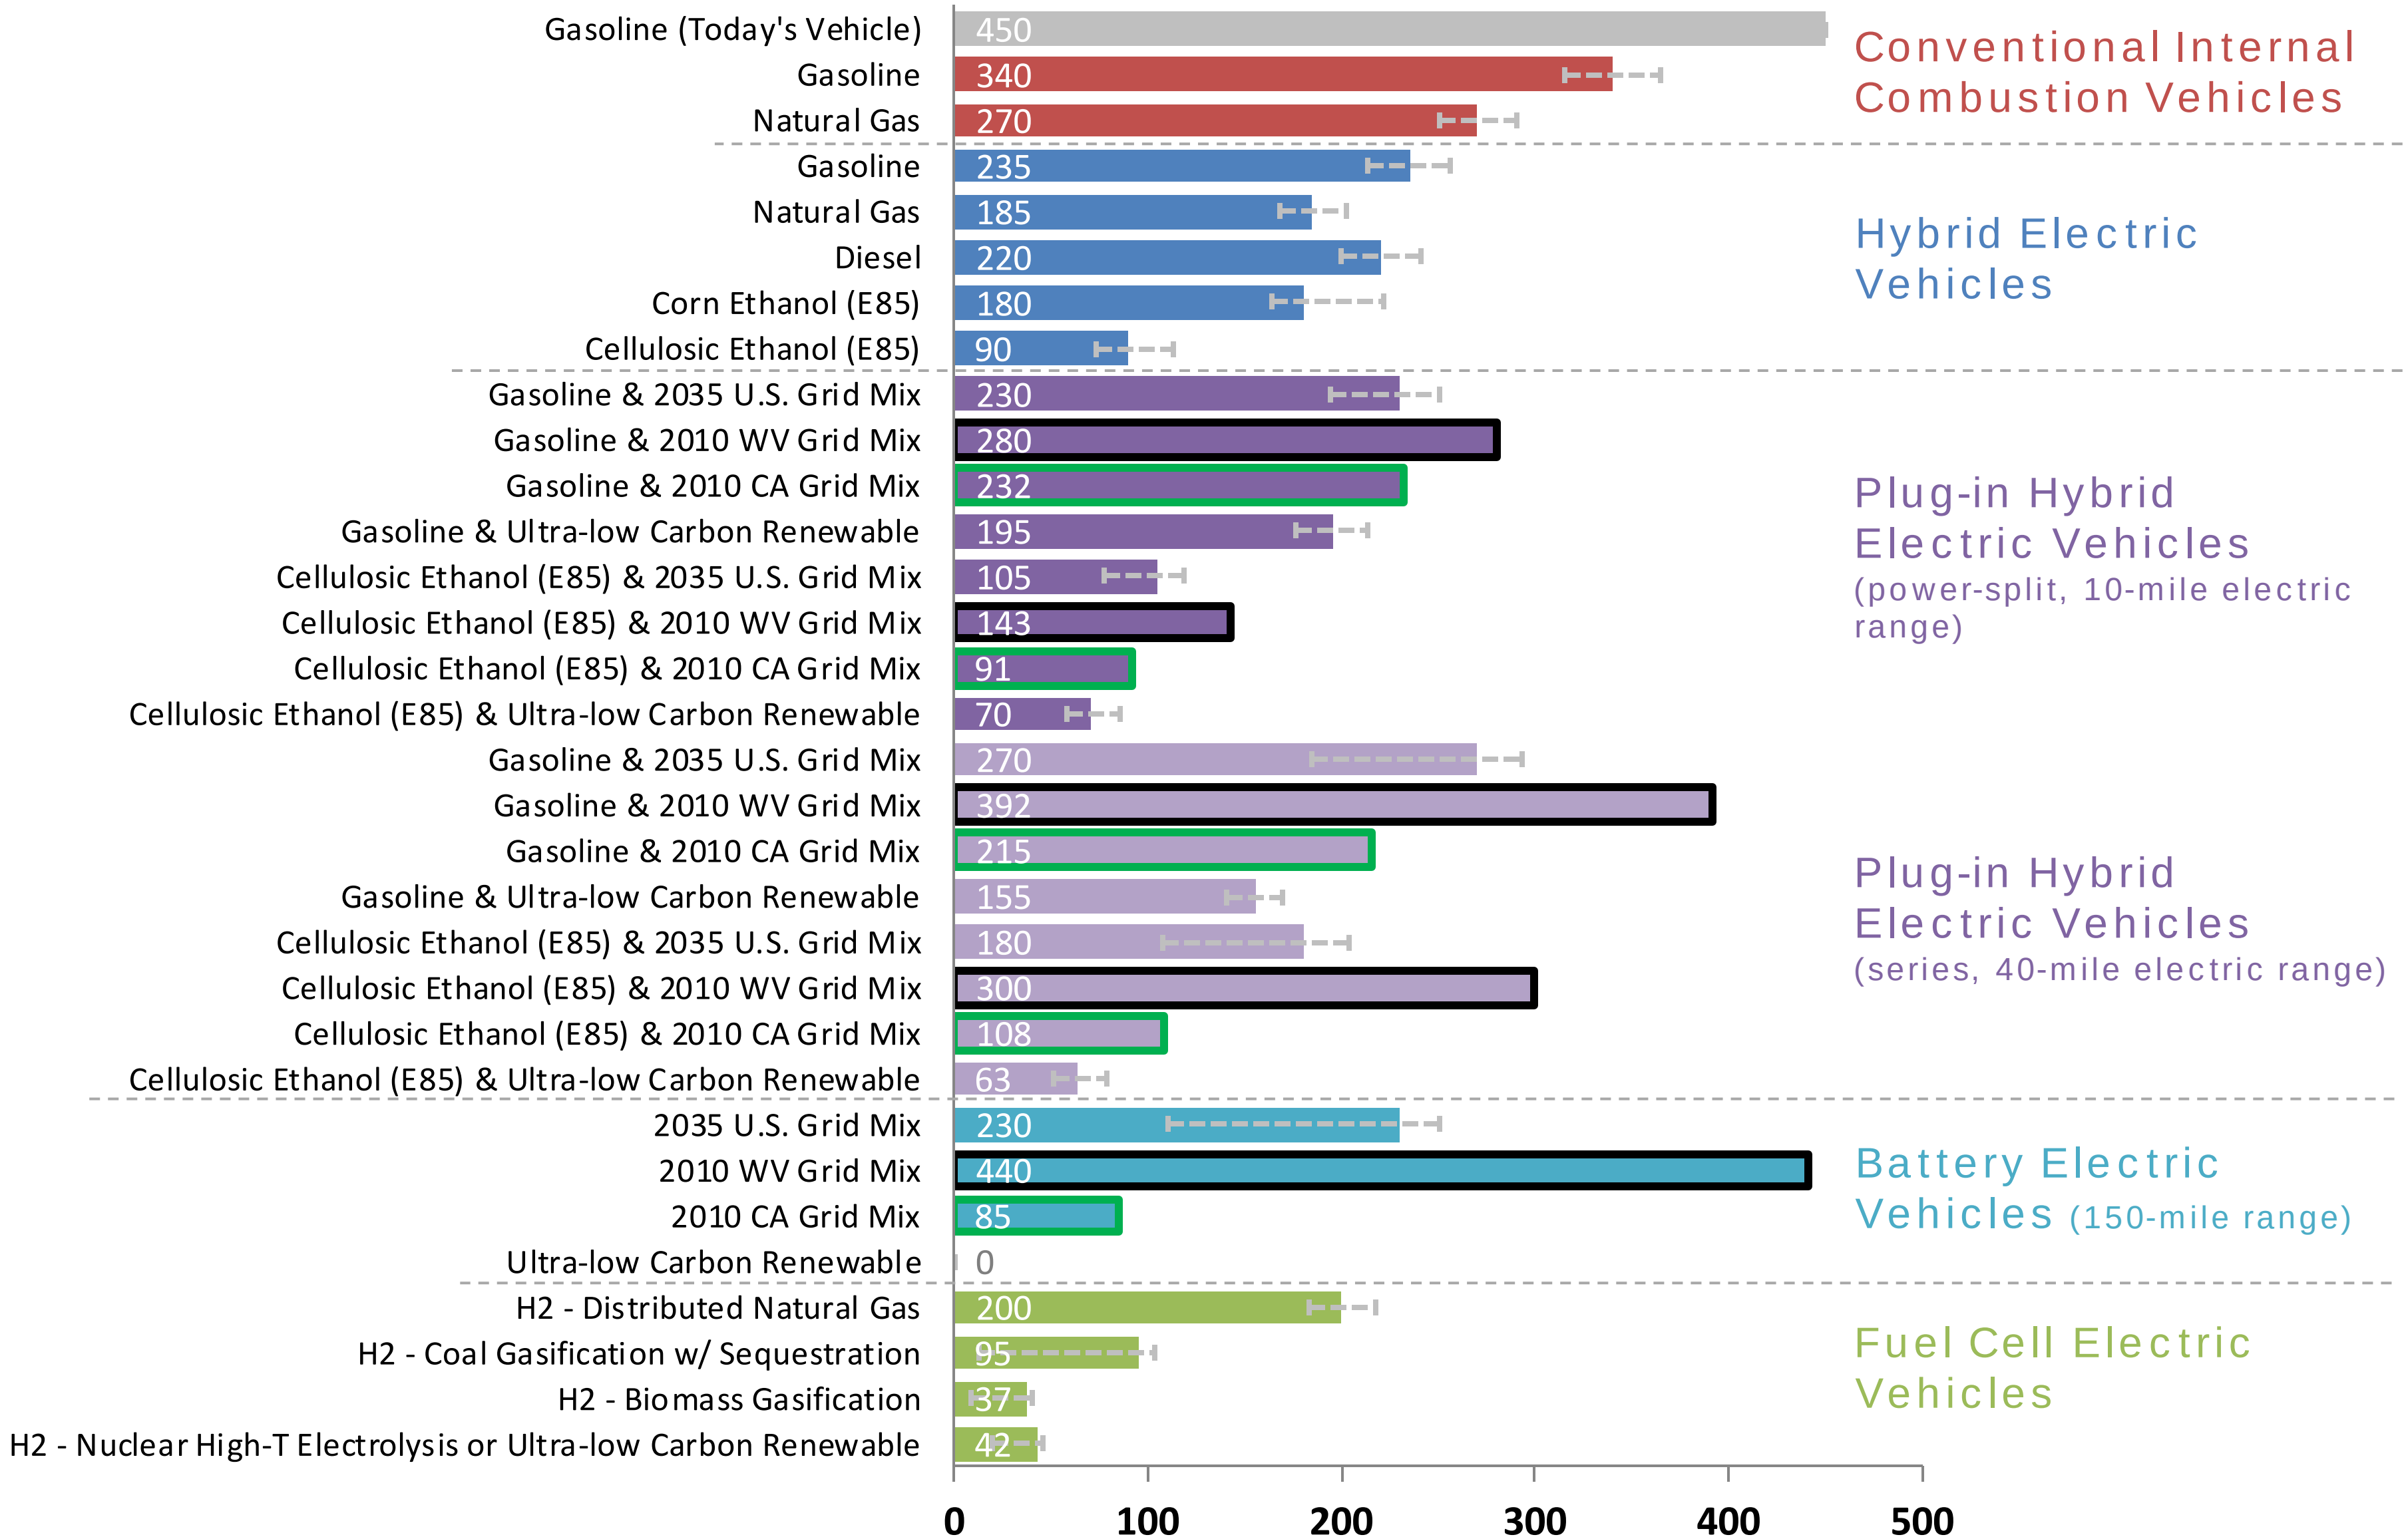

Sample GREET WTW Results for Selected Vehicle/Fuel Options: Petroleum vs. GHGs (relative per-mile results)

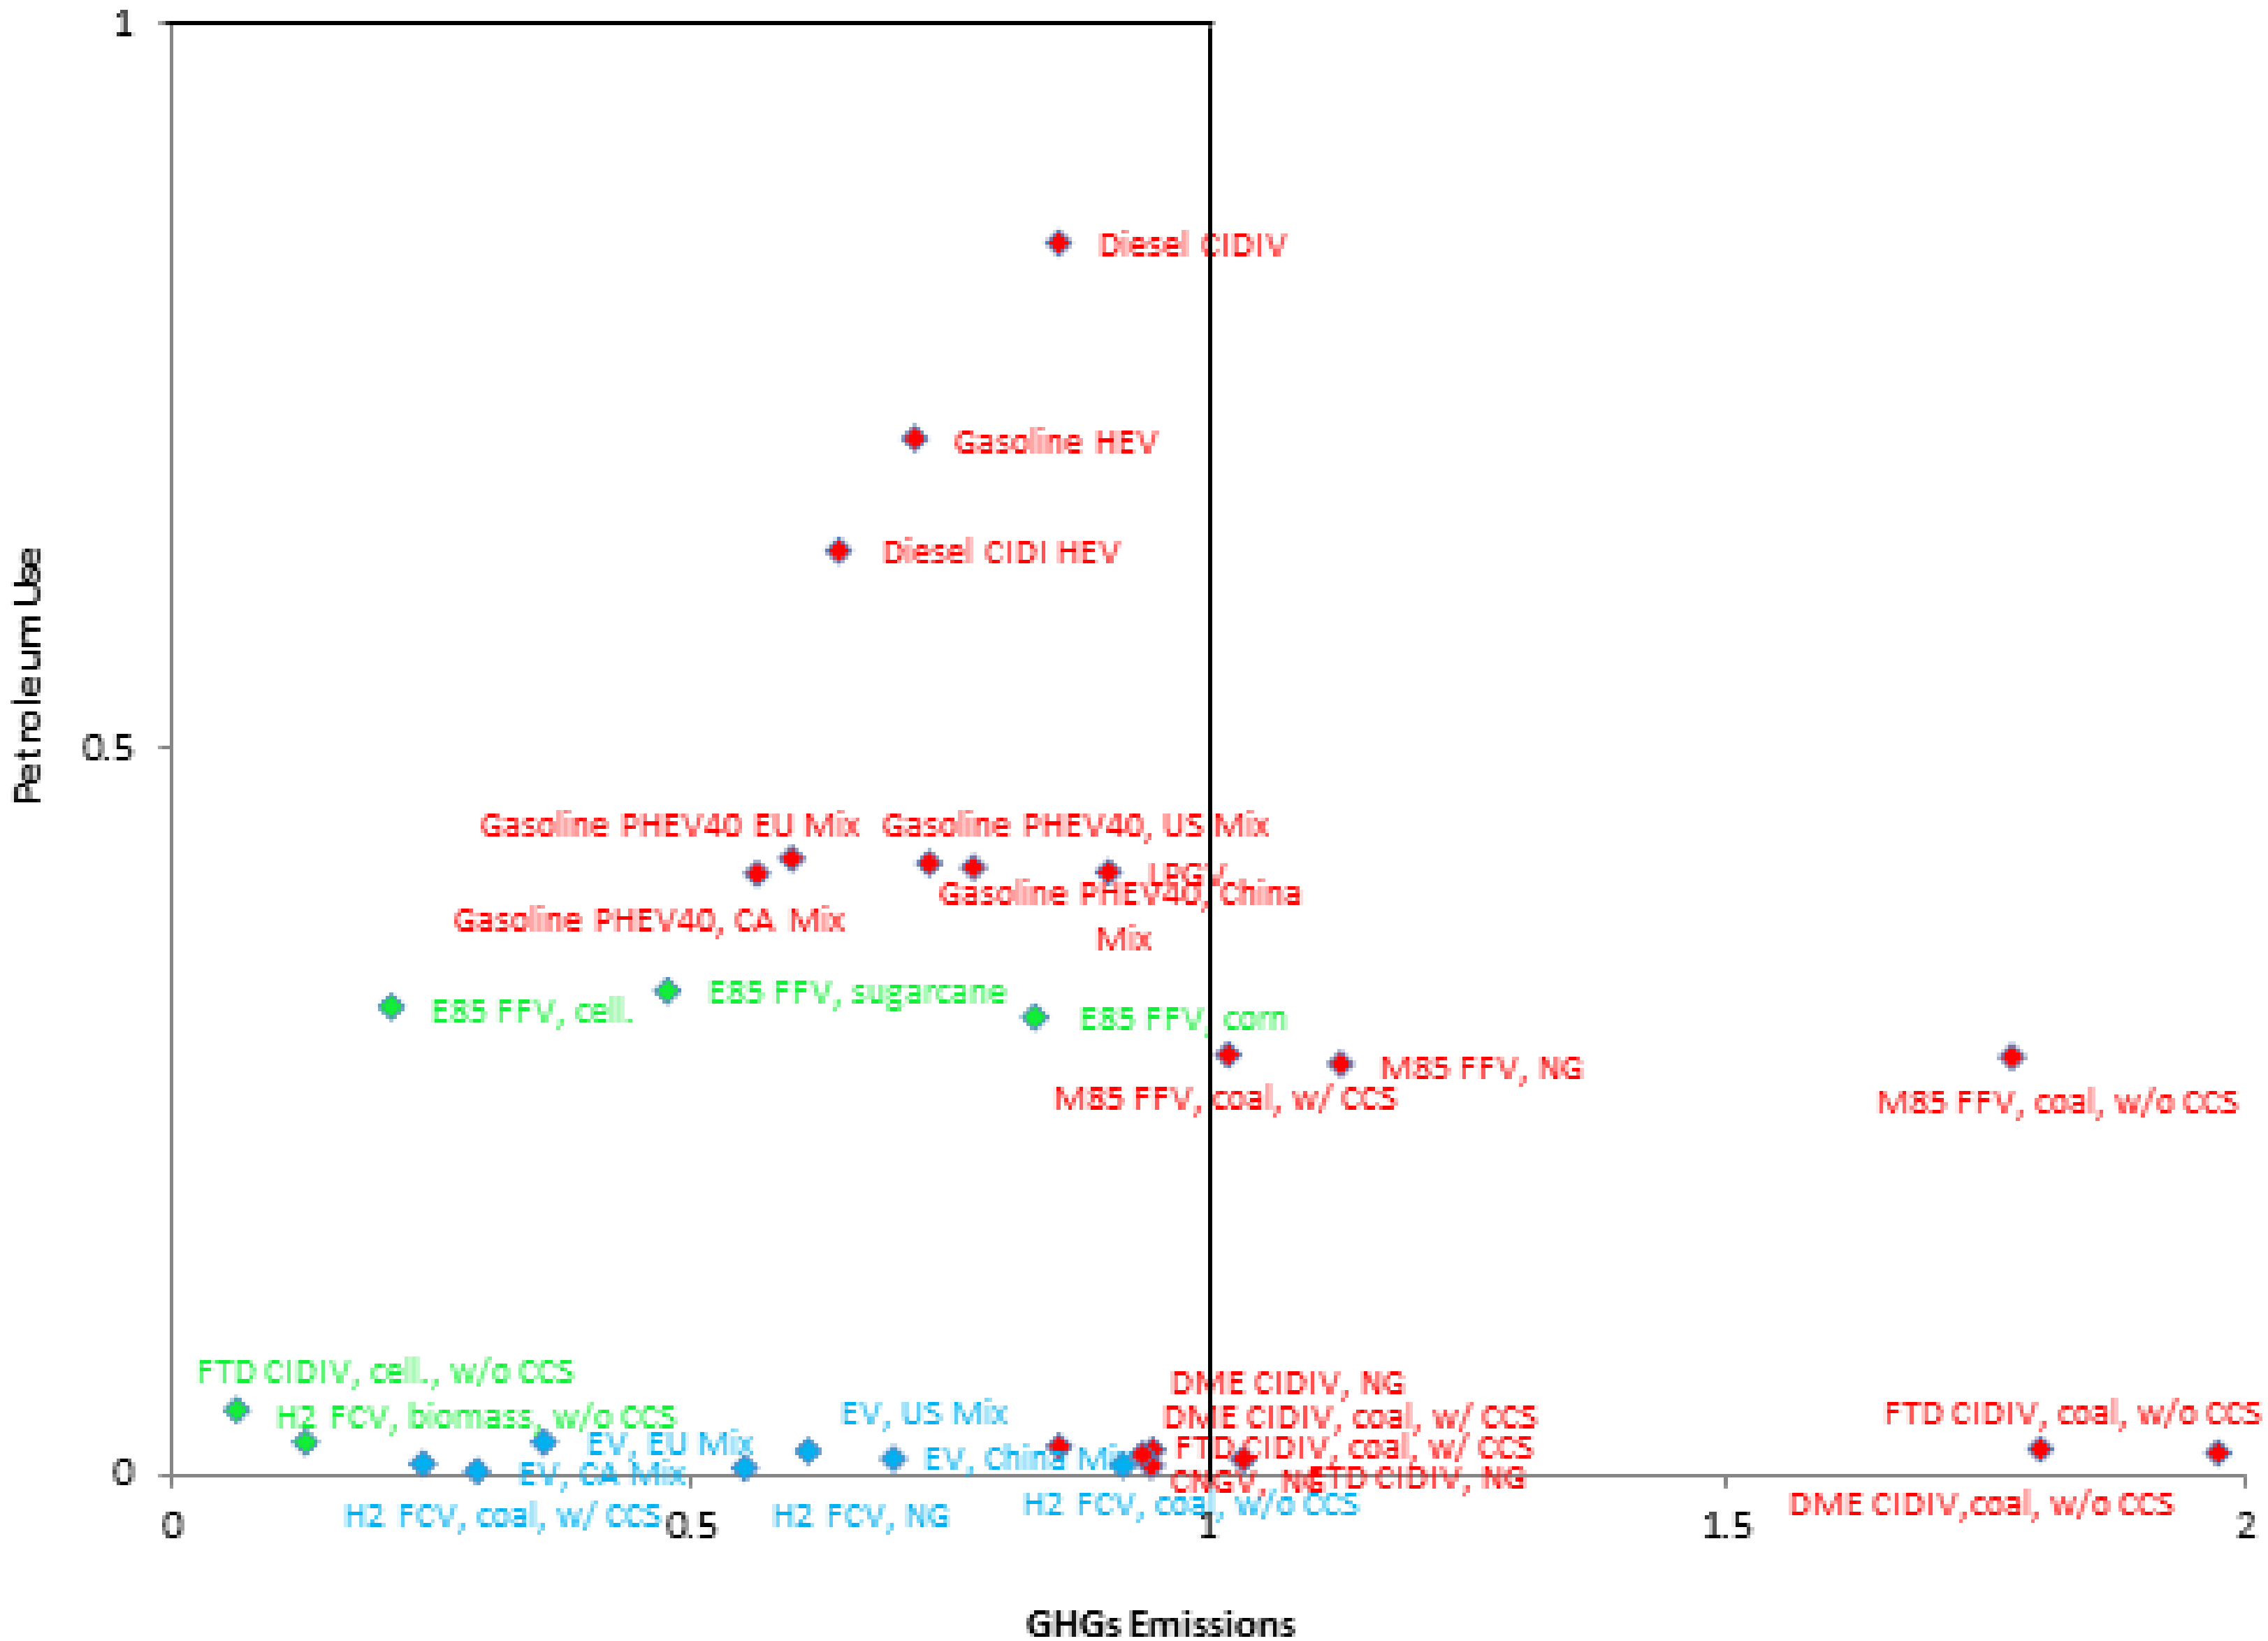

From Wang et al. (2011)

Main Effort and Challenge of LCAs: Data Collection and Reliability -- General Data Sources for GREET

- Open literature: transparent but much variation in data quality
- Process modeling (such as Argonne's own ASPEN Plus and Autonomie simulations): sometime speculative for yet developed commercial technologies
- Companies and technology developers: often proprietary and less transparent
- Engagement of the whole community (LCA practitioners, researchers, developers, agencies, etc.) and data source transparency are critical

Two Distinctly Different Uncertainties in LCAs

- System uncertainties
  - LCA methodology inconsistency: attributional vs. consequential
  - System boundary selection: a moving target
  - Treatment of co-products
  - These issues cause inconsistencies among LCA studies and results
- Technical uncertainties related to data availability and quality
  - Variation in input parameters and output results
  - Stochastic simulation feature is incorporated in GREET
- Model and LCA analysis transparency can help advance understanding and consensus building

Questions and Suggestions Regarding Argonne LCA Research and GREET?

Email to
greet@anl.gov